



Europäisches Patentamt
European Patent Office
Office européen des brevets



⑪ Publication number: **0 640 929 A2**

⑫

EUROPEAN PATENT APPLICATION

⑳ Application number: **94305011.2**

⑤① Int. Cl.⁶: **G06F 15/16**

㉔ Date of filing: **07.07.94**

③① Priority: **30.08.93 US 113299**

④③ Date of publication of application:
01.03.95 Bulletin 95/09

⑧④ Designated Contracting States:
BE DE DK ES FR GB GR IE IT LU NL PT SE

⑦① Applicant: **ADVANCED MICRO DEVICES INC.**
One AMD Place,
P.O. Box 3453
Sunnyvale, California 94088-3453 (US)

⑦② Inventor: **Freemster, Ryan**
2930 Kassarine Pass
Austin, Texas 78704-4655 (US)
Inventor: **Dettmer, David**
7902 Narin Drive
Austin, Texas 78749 (US)

⑦④ Representative: **Wright, Hugh Ronald et al**
Brookes & Martin
52/54 High Holborn
London WC1V 6SE (GB)

⑤④ Inter-processor communication via post office RAM.

⑤⑦ A device and method for providing inter-processor communication in a multi-processor architecture. A post office RAM has a plurality of mailboxes. Each mailbox is write-accessible by one port, but is read-accessible by the other ports. Thus, a processor device on a port has write-access to one mailbox, but can read the other mailboxes in the post office. A transmitting processor communicates with a receiving processor, by utilizing the post office. The transmitting processor writes information into its own mailbox, and signals a receiving processor. The receiving processor determines which of the processor devices signalled it, and reads the information in the transmitting processor's mailbox.

EP 0 640 929 A2

The invention pertains generally to inter-processor communication, and, more particularly, to inter-processor communication via mailboxes.

A processor device in a multi-processor system architecture needs a capability of transferring information to the other processor devices in the system. Various inter-processor communication approaches have been used, with varying degrees of success.

One such approach utilizes a central memory for storing the information to be transferred. Each processor device has read-access and write-access to the central memory via a bus. Bus arbitration logic is used to allow each processor device read-access and write-access to the memory without bus collision or contention. Typically, the central memory is random access memory (RAM), used for storing the information which is passed between the processors.

Unfortunately, such approaches are costly, since they center around the combination of the central RAM to store the information and complex bus arbitration logic to provide each processor device both read-access and write-access to the RAM without bus collision or contention.

One example of the approach is Burkhardt, Jr., et al., "Intercomputer Communication Control Apparatus and Method", U.S. Pat. No. 5,142,683, which discloses a mailbox communication method and apparatus in which multiple processors have access to a common memory. A processor desiring to send a message to another processor inserts the message into its own mailbox, along with the address of the other processor. The sending processor interrupts the receiving processor, which, in response to the interrupt, scans the mailboxes to find the mailbox containing receiving processor's address and reads the message. Since the processors access common memory via a common work station bus, one disadvantage is that overhead is required to deal with bus contention and collision. Moreover, Burkhardt has another disadvantage, since communication paths may be tied up unless processors copy and clear mailbox information quickly.

An example of a shared common mailbox is found in Murray, Jr. et al., "Data Multiplex Control Facility", U.S. Pat. No. 4,665,482, which discloses use of a mailbox between a CPU and an I/O microprocessor. Another example of a mailbox, which does not alleviate the disadvantages, is shown in Fiacconi, "Multi-processor System with Interrupt and Verification Unit", U.S. Pat. No. 4,862,354.

Another approach that avoids bus collision or contention employs commonly available dual-port RAMs. Such RAMs incorporate RAM cells as well as 2-bus arbitration logic on a single chip, and allow both processor devices read-access and write-access to all RAM cells. In conventional dual-port RAM implementations, read information and write information is stored in the same RAM location. Thus, a way must

be provided to prevent the write information from overwriting the read information. Using a dual-port RAM approach, when a sending processor device has information to be sent to a receiving processor, the sending processor device must first check to determine if the receiving processor device has written information to the RAM. If the receiving processor device has written information to the RAM, then the sending processor device must read the RAM before writing the information to be sent to the receiving processor device. The checking which is necessary in this approach unfortunately decreases the possible speed of the inter-processor communication.

This approach becomes increasingly costly and impractical as the number of processor devices in the system increases. For instance, with four processor devices in the system, a total of six dual-port RAMS would be needed to provide communication between each processor. As the number of processor devices in a system increases, the practicality and usefulness of this approach declines.

We will describe an arrangement which provides improved information transfer between processor devices in a multi-processor system and enhances inter-processor communication speed.

We will describe inter-processor communication wherein information sent by one processor device can be ignored by the receiving processor device without tying up communication paths.

A feature of this invention is that it provides inter-processor communication in a multi-processor environment via a post office RAM, which allows each processor device read-access to mailboxes belonging to other processor devices, and write-access to its own mailbox. This eliminates the need for complex bus arbitration logic.

We will describe an arrangement in which the need for checking before writing is eliminated, providing for greater flexibility and speed.

In the preferred embodiment, a receiving processor can override a sending processor, for example, when the sending processor is executing erroneously or when the receiving processor is performing a time-critical task which should not be interrupted.

Furthermore it allows asynchronous as well as simultaneous information transfer between processor devices.

The preferred embodiment allows the number of processor devices to be increased without adversely affecting cost and performance.

In the described arrangement each processor device can communicate at its own speed without slowing down the other processor devices.

It also allows for smaller die sizes compared to conventional dual port RAM techniques.

These and other objects of the invention are accomplished by providing an apparatus for communication between processor devices. The apparatus

comprises a post office including a plurality of mailboxes. Each of the mailboxes is owned by a processor device, and read-accessible by the other processor devices.

In accordance with a further preferred embodiment of the invention, there is provided a method of communication among a plurality of processor devices, including a transmitting processor and a receiving processor. A post office with a plurality of mailboxes is utilized. A transmitting processor writes information into a predetermined one of the mailboxes in the post office. The transmitting processor signals a receiving processor. The receiving processor determines which of the processor devices signalled it. The receiving processor reads the information in the predetermined mailbox.

Brief Description of the Drawings

An exemplary embodiment of the invention is illustrated in the drawings and described in detail below.

In the drawings:

Figure 1 is a simplified block diagram of a post office RAM;

Figure 2 is a detailed block diagram of a multiprocessor system architecture with four processor devices utilizing the post office RAM for inter-processor communication;

Figure 3 is a block diagram illustrating communication between peer SSPs using a post office RAM;

Figure 4 is a block diagram illustrating communication from an 80C186 to an SSP;

Figure 5 is a block diagram illustrating communication from an SSP to an 80C186;

Figure 6 is a block diagram illustrating communication from an external controller to an SSP and an 80C186;

Figure 7 is a block diagram illustrating communication from a mailbox to the external controller;

Figure 8 shows one implementation of the post office RAM wherein each RAM cell is writable by one port and readable by all ports;

Figure 9 is a circuit diagram of the header port address of Figure 8;

Figure 10 is a circuit diagram of the header port connection of Figure 8;

Figure 11 is a circuit diagram of the POCN of Figure 10;

Figure 12 is a circuit diagram of the post office block of Figure 8;

Figure 13 is a circuit diagram of the post office register of Figure 12; and

Figure 14 is a circuit diagram of the post office bit of Figure 13.

Detailed Description of the Preferred Embodiments

Figure 1 illustrates the general structure of the post office RAM 10. The post office RAM conveniently comprises a contiguous block of RAM. The block need not be contiguous; however, this is a practical implementation. The contiguous block of RAM includes a plurality of mailboxes 12, 14, 16, 18. The mailboxes 12, 14, 16, 18 are used to transfer information between the processor devices 20, 22, 24, 26 in a multi-processor system architecture.

In the embodiment shown in Figure 1, by way of illustration and not limitation, there are four processor devices 20, 22, 24, 26, and correspondingly four mailboxes 12, 14, 16, 18. Each mailbox 12, 14, 16, 18 may advantageously be eight contiguous bytes. The mailbox 12, 14, 16, 18 could be larger or smaller; the object is to obtain as much memory as practical without adversely impacting the die size. In any implementation, the desired area for memory must be balanced against the impact on the die size. Eight bytes is the favored balance for this implementation.

Each of the mailboxes 12, 14, 16, 18 is owned by one of the processor devices 20, 22, 24, 26, termed an owner. The owner of a mailbox is allowed write-access to its own mailbox. All other processor devices are allowed read-access to the mailbox. For example, a first mailbox 12 is owned by an external controller 20. The external controller 20 is the only device which has write-access to the first mailbox 12. The other processor devices, a streamlined signal processor 1 (SSP1) 22, a streamlined signal processor 2 (SSP2) 24, and a microprocessor 26, have read-access to the first mailbox 12 but may not write to mailbox 12. The owner of the mailbox may also have read-access to its own mailbox.

Assume that one processor device, termed a transmitting processor, wishes to transfer data to another processor device, termed a receiving processor. The transmitting processor writes information to its own mailbox. The transmitting processor signals the receiving processor to read the transmitting processor's mailbox. The receiving processor may then read the transmitting processor's mailbox.

Write-arbitration is maintained by permitting write-access to a mailbox by its owner, and prohibiting write-access to a mailbox by a processor device other than the mailbox's owner. In the illustrated implementation, one of the processor devices is an external control device 20. If, for example, the external control device 20 attempts a write-access to any mailbox of which it is not the owner, the write-access will be ignored by the mailbox. This may be implemented in the internal circuitry of the post office RAM. In this way, write-arbitration of the post office RAM is maintained without the usual latency and overhead associated with typical bus arbitration logic.

As can be seen from the above description, when two processor devices have information to transmit to each other, each writes the information to its own mailbox. Thus, a write-access by a first processor device followed by a write-access by a second processor device take place in separate mailboxes. Therefore, a bi-directional transfer, wherein two processor devices write transfer information to each other, can take place without concern about overwriting information.

In the implementation illustrated in Figure 1, the post office RAM 10 includes a multi-port RAM with a plurality of cells and a plurality of ports. The RAM is partitioned so that each processor device has a unique area of RAM to which it writes (its own mailbox), and therefore no write contention with another processor device is possible. Each cell is write-accessible by one of the ports. Each cell, however, is read-accessible by all ports. Each port is utilized by one processor device. The bi-directional transfer of information between two processor devices takes place in the two different mailboxes owned by the two processor devices, each mailbox being a cell of the RAM. Each mailbox is allowed to be written by its owner. Information transmitted by one processor device is written to one cell of the RAM, and information received by that same processor is read from another cell of the RAM. Therefore, complex bus arbitration logic, which is ordinarily required to prevent write contention and to synchronize multiple processor device's write-accesses, is completely eliminated.

Since each location of the post office RAM need not be write-accessible by every processor device, die savings are realized. The resulting die size is smaller.

Moreover, since each processor device owns its own mailbox, the processor devices can send information to each other without the latency required by typical dual-port RAM implementations, in which the read information and write information to be transferred is stored in the same RAM locations. No checking before writing is required to see if data in the RAM will be improperly overwritten. Nearly instantaneous bi-directional communication is thus achieved between the processor devices. Inter-processor speed improvements are achieved over the traditional dual-port RAM approach.

Furthermore, simultaneous data transfer between multiple processor devices in the system is permitted. For example, the external controller 20 can write-access its own mailbox 12 at the same time that the other processor devices 22, 24 and 26 write-access their own mailboxes 14, 16, 18.

Moreover, asynchronous data transfer between the processor devices is allowed. When the transmitting processor is writing the information into its own mailbox, the receiving processor may be executing some totally unrelated instructions at the same time.

Later, the receiving processor may execute instructions which are related to information written by the transmitting processor. As a result, each processor device can communicate without regard to the speed of the other processor devices.

Additionally, information which is written into the mailbox of the post office RAM by a transmitting processor can be ignored by the intended receiving processor without causing a system crash or a communication bottleneck. A system crash or communication bottleneck would deleteriously affect the other processor devices in the system. Nevertheless, in the post office RAM, a receiving processor may override the transmitting processor by ignoring the information. This is useful in situations such as erroneous execution by the transmitting processor, or performance by the intended receiving processor of a time-critical task which cannot be interrupted.

The implementation of the post office RAM, shown here for four processor devices, can be expanded to handle additional processor devices. Also, a mailbox, here illustrated as eight bytes, can be expanded or reduced. The post office RAM can be reduced to handle fewer processor devices, if desired. The principles described herein still apply.

Figure 2 is a detailed block diagram of one embodiment of a multi-processor architecture utilizing a post office RAM for communication. A motion control or servo control architecture 100 incorporating a post office RAM 10 is shown generally in simplified block diagram format. In this embodiment there are four processor devices. The post office RAM 10 includes four mailboxes 12, 14, 16, 18. The four processor devices, including a master microprocessor 26, SSP1 22, SSP2 24, and an external device (not illustrated) can access the post office RAM 10.

The master microprocessor 26 is connected to its mailbox 18 over a first bus 104a. The master microprocessor 26 also provides address and data information to SSP1 22, SSP2 24 and the post office 10 over the first bus 104a.

The first bus 104a also may transmit control information. Additionally, the first bus 104a may interface with parallel I/O 122, which in turn communicates via a general I/O bus 130. In the embodiment illustrated, the first bus 104a is a 16-bit A/D/C bus.

SSP2 24 communicates with its mailbox 16 over a second bus 104b. SSP1 22 communicates with its mailbox 14 over a third bus 104c. The external device (not illustrated) communicates with its mailbox 12 via a header port on a fourth bus 104d.

Each of the streamlined signal processors 22, 24 may be a microprogrammable processor, including a sequencer memory 116a, 116b, an instruction memory RAM 117a, 117b, an instruction memory ROM 120a, 120b and an execution unit. It will be known to those of ordinary skill in the art that such an execution unit could include an arithmetic logic unit, registers

and related processing devices. Such a microprogrammable processor could be programmed with microcode. Each of the streamlined signal processors 22, 24 performs programmed tasks. In the illustrated servo control architecture, the streamlined signal processors 22, 24 communicate with appropriate peripherals and perform tasks related to servo loop control.

Figure 2 shows one example in which the post office RAM 10 is implemented as a plurality of contiguous RAM blocks. In this embodiment, there are four RAM blocks 12, 14, 16, 18. Each RAM block corresponds to a mailbox 12, 14, 16, 18. These four RAM blocks can be used for transferring information among the four processor devices in the system, the four processor devices being the microprocessor 26, SSP1 22, SSP2 24, and the external processor or controller connected to the header port. A first RAM block 18 is write-accessed by the microprocessor 26 through the second bus 104b. SSP2 108 write-accesses a second RAM block 14 through a third bus 104d. SSP1 106 write-accesses a third RAM block 16 through a fourth bus 104c. The external processor connected to the header port accesses a fourth RAM block 12 through the first bus 104a.

The architecture also includes X-addressable RAM (XRAM) 112a, 112b and Y-addressable RAM (YRAM) 114a, 114b. Each streamlined signal processor can access one of the XRAMs 112a, 112b, and YRAMs 114a, 114b. The master microprocessor 26 can also access the XRAMs 112a, 112b and YRAMs 114a, 114b via the first bus 104a.

Each RAM block 12, 14, 16, 18 may be written by its owner, that is, one of the processor devices 22, 24, 26 or the external processor 20. Thus the microprocessor 26 writes data to its RAM block 18, the streamlined signal processors 22, 24 write data to their RAM blocks 14, 16; and an external controller, such as an optical data channel controller, writes data to its RAM block 12. A processor device which is not the owner of the mailbox will not successfully write data to the corresponding RAM block. In this way, write arbitration is maintained without latency and overhead associated with typical bus arbitration logic.

All of the processor devices can read all of the RAM blocks 12, 14, 16, 18. This facilitates transfer of data from one processor device to another. To exchange information between processor devices, the processor device with the information to be transferred writes its data to its own RAM block. The transmitting processor then signals the receiving processor to read the transmitting processor's RAM block. Assume, for example, that information is to be exchanged between SSP1 22 and the microprocessor 26. SSP1 22 writes data to its RAM block 14 via the third bus 104c. Then SSP1 24 signals the microprocessor 26 to read SSP1's RAM block 14.

Specific methods of signalling in conjunction with

use of the post office RAM will be described with reference to Figures 3-7. In order to communicate between two processor devices, the transmitting processor writes information into its mailbox in the post office RAM. The transmitting processor then signals the receiving processor. The receiving processor determines which processor signalled it; then reads the information in the transmitting processor's mailbox. The receiving processor then acts on the information. The exact signaling method depends on which processor device is signaling, and which processor device is being signaled.

Peer communication, illustrated in Figure 3, refers to communication between similar processor devices (a peer). In the illustrated embodiment, peer communication occurs when the SSPs communicate with each other. Each peer has at least one vector register 402a-d and trigger 404a-d pair, which are used in signalling.

The vector register 402a-d preferably contains the start address of a subroutine. The subroutine preferably directs the processor device to read the mailbox 14, 16 in the post office RAM 10 which is owned by the other peer. The subroutine also directs the processor device to perform some task based on the information in the mailbox.

The triggers 404a-d inform the processor device that it should execute the subroutine pointed to by the corresponding vector register 402a-d. A plurality of vector register 402a-d and trigger 404a-d pairs can be used to specify a peer to address one of a plurality of subroutines.

The triggers 404a-d may be enabled by writing to a strobe location 403a having a unique address in a data space of the SSP 106, 108. To signal, the signalling SSP sets a latch by writing to the strobe's unique address in the data space. When the signaled SSP enters an idle state, it detects the latch. The signaled SSP then advantageously branches immediately to the subroutine which is pointed to by the corresponding vector register 402a-d. After the signaled SSP has read the appropriate mailbox and processed the mailbox's information (as directed by the subroutine), the signaled SSP may send an acknowledgement back to the signalling SSP to indicate that the mailbox has been processed. Alternatively, the signaled SSP may simply return to the idle state to await other triggers caused by other processor devices.

In the embodiment illustrated in Figure 3, each SSP 22, 24 is provided with two pairs of asynchronous vector registers 402a-d and triggers 404a-d. The vector registers 402a-d and triggers 404a-d are used to direct the SSP to perform a task which is related to its peer SSP. Each of the two vector registers 402a-d (called SSP_A and SSP_B vector registers) is preferably programmed at power-up time with a start address of one of two subroutines that will be executed by the signaled SSP. The vector registers 402a-d may

also be downloaded with the start address. The sub-routines may contain microcode instructions which preferably direct the signaled SSP to read information from the appropriate mailbox, and subsequently to act on the information in the mailbox. An SSP signals its peer SSP to execute the subroutine pointed to by a vector register 402a-d by using its corresponding trigger 404a-d. Both trigger latches (called SSP_A and SSP_B triggers) are preferably cleared when the signaled SSP enters the idle state.

For example, SSP1 22 write-accesses its own mailbox 14, and writes some information to its mailbox 14. SSP1 22 signals SSP2 24 by way of a SSP1_A trigger 402a or a SSP1_B trigger 402b. When SSP2 24 is in the idle state, the SSP1_A trigger 402a causes SSP2 24 to execute a first subroutine pointed to by a SSP1_A vector register 404a. Similarly, the SSP1_B trigger 402b causes SSP2 24 to execute a second subroutine pointed to by a SSP1_B vector register 404b. Both subroutines cause SSP2 24 to read SSP1's mailbox 14.

Likewise, SSP2 24 writes information to its own mailbox 16. SSP2 24 signals SSP1 22 by way of a SSP2_A trigger 404c or a SSP2_B trigger 404d. When SSP1 22 is in the idle state, the SSP2_A trigger 404c causes SSP1 22 to execute a third subroutine pointed to by a SSP2_A vector register 402c. The SSP2_B trigger 404d causes SSP1 22 to execute a fourth subroutine pointed to by a SSP2_B vector register 402d. Both subroutines cause SSP1 22 to read SSP2's mailbox 16.

Figure 4 illustrates the master microprocessor communicating to one of the SSPs. The master microprocessor can communicate with the SSP in a manner similar to the above-described peer communication. That is, the master microprocessor can write to its own mailbox, and signal the SSP. The SSP can then read the master microprocessor's mailbox and act on the information.

In the illustrated embodiment, the master microprocessor is an 80C186 26. The 80C186 26 writes its mailbox 18 and signals an SSP 22, 24 to read the mailbox's contents. An 80C186 vector register 502 is provided for each SSP 22, 24, to allow the 80C186 26 to signal one of the SSPs 22, 24 to read the 80C186 mailbox 18.

A memory-mapped trigger 504 (called 80C186 trigger) is provided for each SSP 22, 24. The trigger 504 may be a trigger latch with a unique address, which is provided in a data space of the 80C186. To signal the SSP, an SSP's 80C186 trigger latch is preferably set by the 80C186 26 writing to the trigger latch's unique address. The trigger latch is preferably cleared when the SSP enters the Idle State.

Specifically, SSP1's 80C186 trigger latch 504a is set when the 80C186 26 writes to its unique address. Similarly, SSP2's 80C186 trigger latch 504b is set when the 80C186 26 writes to its unique address.

When SSP1 22 is in the idle state, the presence of the SSP1 80C186 trigger latch 504a causes SSP1 22 to execute a subroutine pointed to by the corresponding SSP1 80C186 vector register 502a. When SSP2 24 is in the idle state, the presence of the SSP2 80C186 trigger latch 504b causes SSP2 24 to execute a second subroutine pointed to by the corresponding SSP2 80C186 vector register 502b.

Figure 5 illustrates SSP to master microprocessor communication. In the illustrated embodiment, SSP signaling to the 80C186 is slightly different from the above-described communication, due to the differences in architecture of the master microprocessor. Since the 80C186 processor is based on interrupts rather than triggers and vector registers, the SSPs preferably use interrupts as a way of signaling the 80C186 that the mailbox has been written.

Use of interrupts for communication may be as follows. One of the SSPs 22, 24 can generate an interrupt, and the master microprocessor can execute a subroutine which determines which SSP generated the interrupt. Next, the master microprocessor can read information in the mailbox owned by the SSP which generated the interrupt. Finally, the master microprocessor can act on the information which it read.

In the illustrated embodiment, an interrupt vector 602 and a corresponding interrupt service routine (ISR) is programmed into a program memory space of the 80C186 before the system is powered-up. The interrupt vector contains the address of the ISR. The program memory space is advantageously EPROM. An SSP generates an interrupt to the 80C186 in a similar way as it generates a trigger to its peer SSP. The interrupt is generated when the SSP simply writes to a memory-mapped latch 606a, 606b, called a 80C186 interrupt strobe 606. Outputs 610a, 610b of each the latches 606a, 606b from both SSPs are OR-ed together to drive a 80C186 INT1 interrupt input pin 608. In addition, the output 610a, 610b of each of these latches from both SSPs is connected to a bit in an SSP status register 612 in the master microprocessor 26. By reading the SSP status register 612, the 80C186 can determine which SSP caused the interrupt.

Therefore, the INT1 ISR preferably contains instructions which direct the 80C186 to first read the SSP status register 612 to determine which of the SSPs 22, 24 caused the interrupt, next to read the mailbox 14, 16 owned by the indicated SSP 22, 24, and subsequently, to act on that information. The instructions may be in Assembly Language. The 80C186 interrupt strobe latch 606a, 606b is preferably cleared when the 80C186 reads the SSP status register 612.

Figure 6 illustrates communication of the external controller to the SSPs and the master microprocessor. The external controller signals the SSPs by way of a vector register and trigger pair in a manner

each post office block. Each post office block 822, 824, 826, 828 further includes data input/output lines (HPD, D0, D1, D2) 806, 808, 810, 812. HPD contains 16 bits of data and the remaining data I/O lines are 16 bits for each port. Potential write collisions are avoided since only one port has write access to its mailbox.

Figure 9 illustrates the header port address (HPA) 830a of Figure 8. As illustrated, the HPA includes five bits (4:0). The zeroth, third and fourth bits of the HPA are inverted as HPA0L 902, HPA3L 904, and HPA4L 906, respectively. The first four bits are used as a header address (HDR) 908.

Figure 10 illustrates the header port connection. Included are two post office connections POCON (hpcon0, hpcon1) 1002a,b. The HDR 908 is input as an address into each POCON. The first bit of the HPA 830a, the HPRD 832a, and an inverted HPENL 836 are combined by a logical-NAND, and inverted, to obtain a read input 1004a to one POCON 1002a. Similarly, the HPA0L 902, the HPRD 832a, and the inverted HPENL 836 are combined by a logical-NAND, and inverted, to obtain the read input 1004b to the other POCON 1002b. The first bit of the HPA 830a, HP3L 904, HP4L 906, an inverted HPRD 832a, and the inverted HPENL 836 are combined by a logical-NAND, and inverted, to obtain a write input 1006a to one POCON 1002a. Similarly, HPA0L 902, HP3L 904, HP4L 906, the inverted HPRD 832a, and inverted HPENL 836 are combined by a logical-NAND, and inverted, to obtain the write input 1006b to the other POCON 1002b. Write inputs 1006a and 1006b are inactive if HPRD 832a is active. Additionally, the logic is structured so that POCON 1002a addresses odd addresses and POCON 1002b addresses even addresses. Each POCON 1002a,b has a plurality of output write lines (WR0 - WR3) 802 and a plurality of input read lines (RD0 - RD15) 804.

Figure 11 provides further detail of the structure of the post office connections 816, 818, 820, 1002a, 1002b. The input address lines ADR(3:0) 830b-d or HADR(3:0) 908 are decoded as shown in figure 11 to provide RD0-RD15 outputs (corresponding to the read addresses 804 in Fig. 8). Thus, for example, the complement of bits ADR(0) - ADR(3), 1102, 1104, 1106 and 1108 are combined by a logical-NAND 1104, which is gated by RD line 1112, to provide RD0. Additionally, bits ADR(0), ADR(1) and their complement are combined with the write input line 1114 (corresponding to 834a-c, 1006a, 1006b) via a logical-NANDs 1116, and inverted, to obtain four output write lines (WR0 - WR3) 802.

Figure 12 is a more detailed view of post office block 822. Each post office block includes 8 identically configured register blocks 1202, 1204, 1206, 1208, 1210, 1212 and 1214. Each register block 1202-1214 stores an 8 bit byte of data. Each block receives a single write (WR) signal 1216 and 8 bits of data 1218. Additionally, each register block receives read address

lines 1220 from each of the four post office connections (POCON or HPCON) 814, 816, 818, 820. The high order data bits (15:8) 1218 go into block 1202 and the low order bits (7:0) 1222 are sent into block 1204. Note that HPCON sends and receives byte wide data while each of the POCONs can send and receive data on a 2 byte (16 bit) basis. Thus, the two blocks 1202 and 1204 combined provide a 16 bit data word. Each register block receives a unique write line from the header port (since this is the header port post office) and each read line from the other ports are directed to two register blocks to access two byte data.

Figure 13 is a block diagram for each post office bit shown in figure 12. Eight post office bits 1302 are used for each post office block 1202-1214. Each bit receives a data bit (DIN (I)) 1304, a write line 1306, and read address lines 1308. Four data outputs 1310 are provided from each post office bit to each of the four ports.

Figure 14 shows an implementation of the post office bit 1302. Each read address line (and their complement) 1402 are used to output data 1404 through the respective output buffers 1406. DIN 1412 is transmitted through a first gate 1406 when write is active, into a two inverter latch structure 1408. Latch 1408 stores the data when the write line WR 1414 is deactivated. Gate 1410 transmits the latched data when write is not active to buffers 1406 and latch 1416. Latch 1416 stores data when write is active, thus preventing read access of data which is being written.

While specific embodiments of the invention have been described and illustrated, it will be clear that variations in the details of the embodiments specifically illustrated and described may be made without departing from the true spirit and scope of the invention as defined in the appended claims.

Claims

1. An apparatus for communication between a plurality of processor devices, comprising
 - a post office memory including a plurality of mailbox memories;
 - each of the mailbox memories being write accessible only by its owner processor device, and read-accessible by its owner and other the processor devices.
2. An apparatus as in claim 1, wherein:
 - the plurality of processors includes a transmitting processor and a receiving processor;
 - a signal line provides communication between the processors; and
 - a subroutine in the receiving processor,

corresponding to the signal line, reads the mailbox memory of the transmitting processor.

3. An apparatus as in claim 2, wherein at least one of the processor devices is external to a chip, and the other processor devices are on the chip. 5
4. An apparatus as in claim 3, wherein at least two of the processor devices on the chip are stream-lined signal processors, and one of the processor devices on the chip is a master microprocessor. 10
5. An apparatus as in claim 2, wherein the signal line is a trigger, and further comprising a vector register pointing to the subroutine. 15
6. An apparatus as in claim 2, wherein the signal line is an interrupt, and wherein the subroutine is an interrupt service routine addressed by the interrupt. 20
7. An apparatus as in claim 5, wherein the plurality of processors comprises at least three processor devices, including at least two transmitting processors and at least one receiving processor, and a signal line between the receiving processor and each of the transmitting processors, further comprising: 25
 - (a) an OR gate producing a logical-OR of the signal lines; and
 - (b) a mailbox status register associated with the receiving processor, each of the signal lines setting a status of one of the transmitting processors in the mailbox status register. 30
8. An apparatus as in claim 5, having at least three processor devices, including at least two transmitting processors and at least one receiving processor, and a signal line between the receiving processor and each of the transmitting processors, further comprising: 35
 - (a) an OR gate producing a logical-OR of the signal lines;
 - (b) a mailbox status register associated with the receiving processor, each of the signal lines setting a status of one of the transmitting processors in the mailbox status register. 40
9. An apparatus as in claim 1, wherein the post office memory is a multi-port random access memory (RAM), and each of the mailbox memories is a predetermined area of the RAM; 45

each predetermined area of the RAM further comprising means for providing write-access for only one of the processor devices to the predetermined area of the RAM from one of the ports; and

means for providing read-access to the

RAM for the processor devices from each port.

10. An apparatus as in claim 9, wherein the device is a 4-port RAM.
11. An apparatus as in claim 10, wherein the predetermined area of RAM is 8 bytes.
12. An apparatus as in claim 1, further comprising:
 - a plurality of ports corresponding to the plurality of processor devices; and
 - wherein each of the post office memories comprises,
 - a plurality of register blocks, each of the register blocks including,
 - storage for a predetermined number of data bits,
 - a single data-in bus connection,
 - a plurality of data-out bus connections, one data-out bus connection for each of the plurality of ports,
 - a plurality of read input lines, one read input line from each of the ports, and
 - a single write line, the write line coming from the port corresponding to the owner processor device.
13. A method of communicating among a plurality of processor devices, including a transmitting processor and a receiving processor, utilizing a post office with a plurality of mailboxes, the method comprising the steps of:
 - writing information into a predetermined one of the mailboxes in the post office with a transmitting processor;
 - signaling a receiving processor with the transmitting processor;
 - determining in the receiving processor which of the processor devices signalled the receiving processor; and
 - reading the information in the predetermined mailbox with the receiving processor.
14. The method of claim 13, further comprising the step of the receiving processor acting on the information.
15. The method of claim 13, wherein the writing step occurs via a first port which is reserved to the transmitting processor.
16. The method of claim 13, wherein the signalling step comprises the transmitting processor issuing an interrupt to the receiving processor.
17. The method of claim 13, the determining step including the receiving processor executing an interrupt subroutine corresponding to the interrupt,

and the reading step being performed by the interrupt subroutine.

18. The method of claim 17, further comprising the step of the transmitting processor setting a status register indicating the transmitting processor, and the determining step comprising the receiving processor reading the status register to determine the transmitting processor. 5
19. The method of claim 13, wherein the signalling step comprises the transmitting processor issuing a trigger to the receiving processor. 10
20. The method of claim 19, the determining step including executing a subroutine pointed at in a vector register corresponding to the trigger, and the reading step being performed by the subroutine. 15
21. The method of claim 20, further comprising the step of the transmitting processor setting a mailbox status register indicating the transmitting processor, and the determining step comprising the receiving processor reading the mailbox status register to determine the transmitting processor. 20
22. A method of bi-directional communication between at least two processor devices, utilizing a post office with a plurality of mailboxes, the method comprising the steps of: 25
 - writing information into a first mailbox in the post office RAM, and signaling a second processor device with a first processor device; 30
 - writing information into a second mailbox in the post office RAM, and signaling the first processor device with the second processor device; 35
 - determining in the second processor device which of the processor devices signalled it; 40
 - determining in the first processor device which of the processor devices signalled it; 45
 - reading the information in the first mailbox with the second processor device; and
 - reading the information in the second mailbox with the first processor device.
23. A post office RAM comprising:
 - a multi-port RAM, having a plurality of cells and a plurality of ports, any one of the RAM cells being read-accessible by the plurality of ports, and write-accessible by only one of the ports. 50
24. An apparatus for communication' between a plurality of processor devices comprising a central memory including a respective memory sec- 55

tion for each of said processor devices, the arrangement being such that information may only be put into each said memory section from its associated processor device but information may be removed therefrom by its associated processor device or other processor devices.

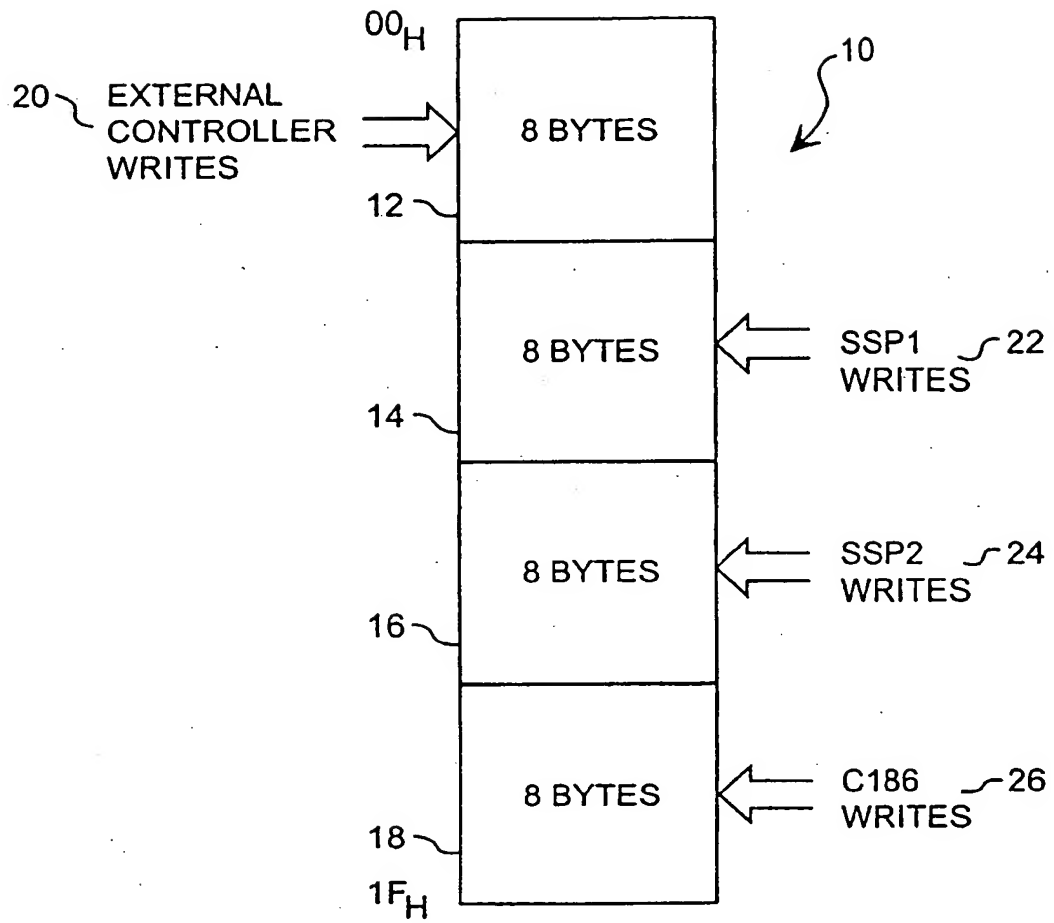


FIG. 1

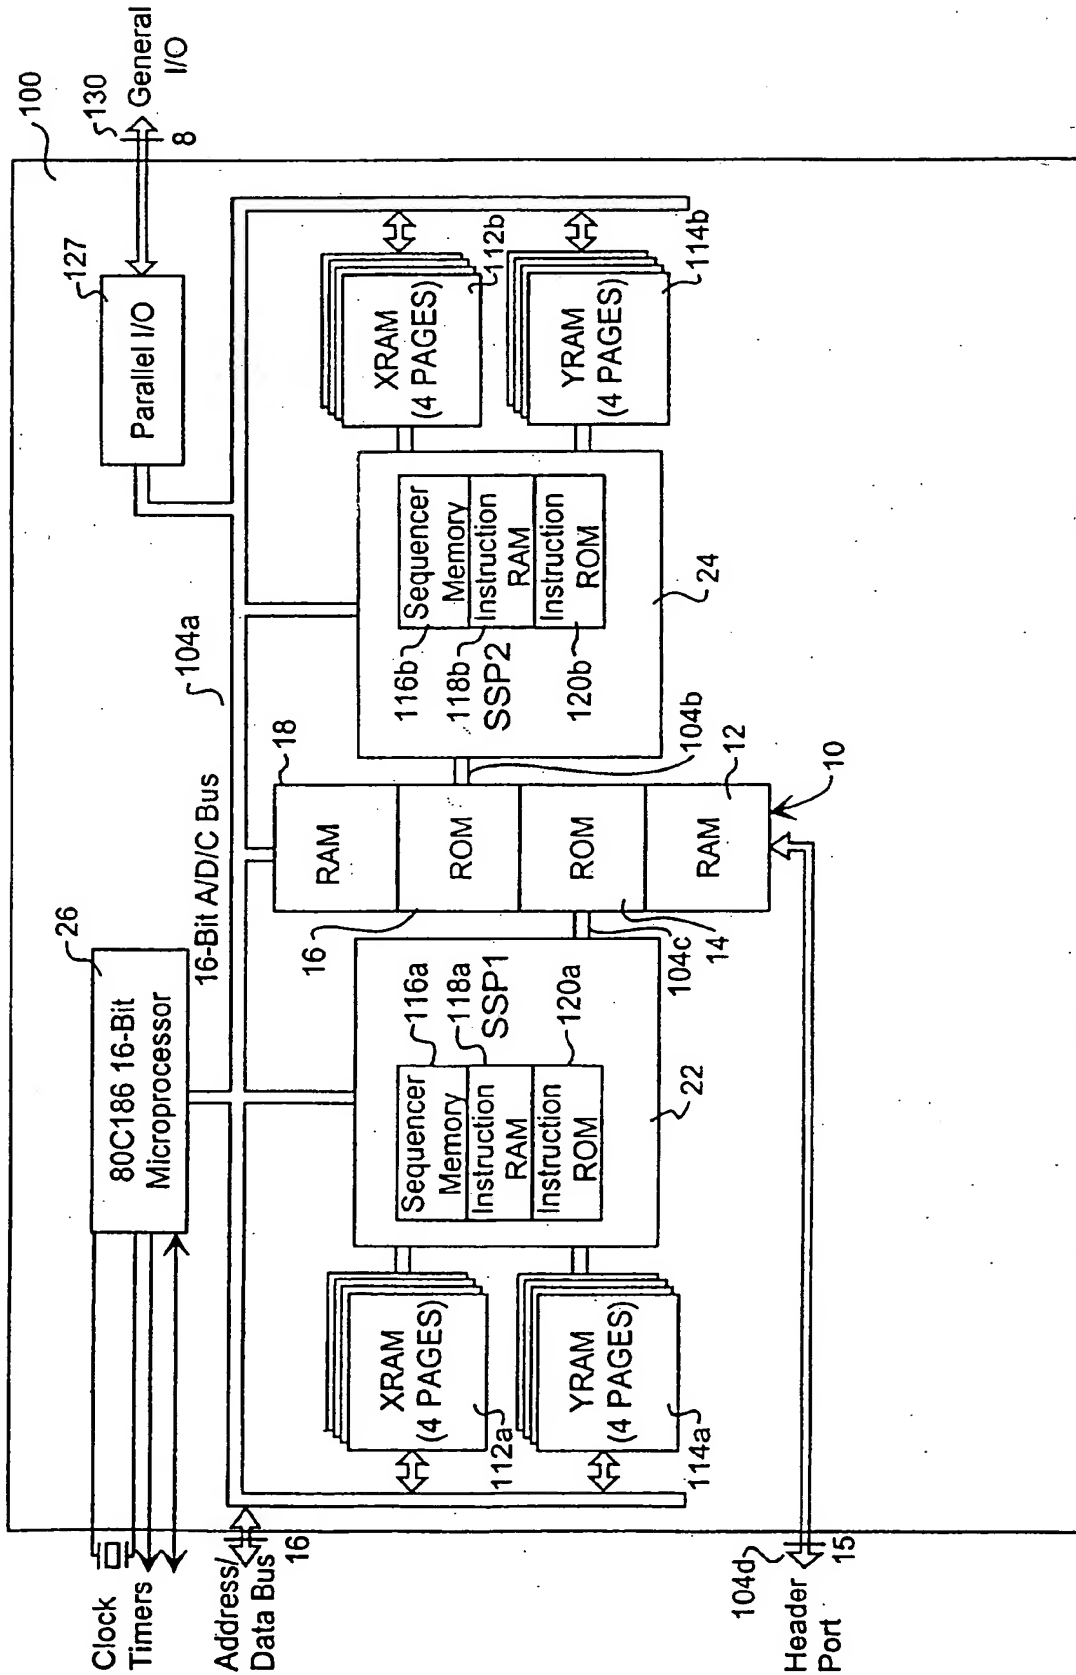


FIG. 2

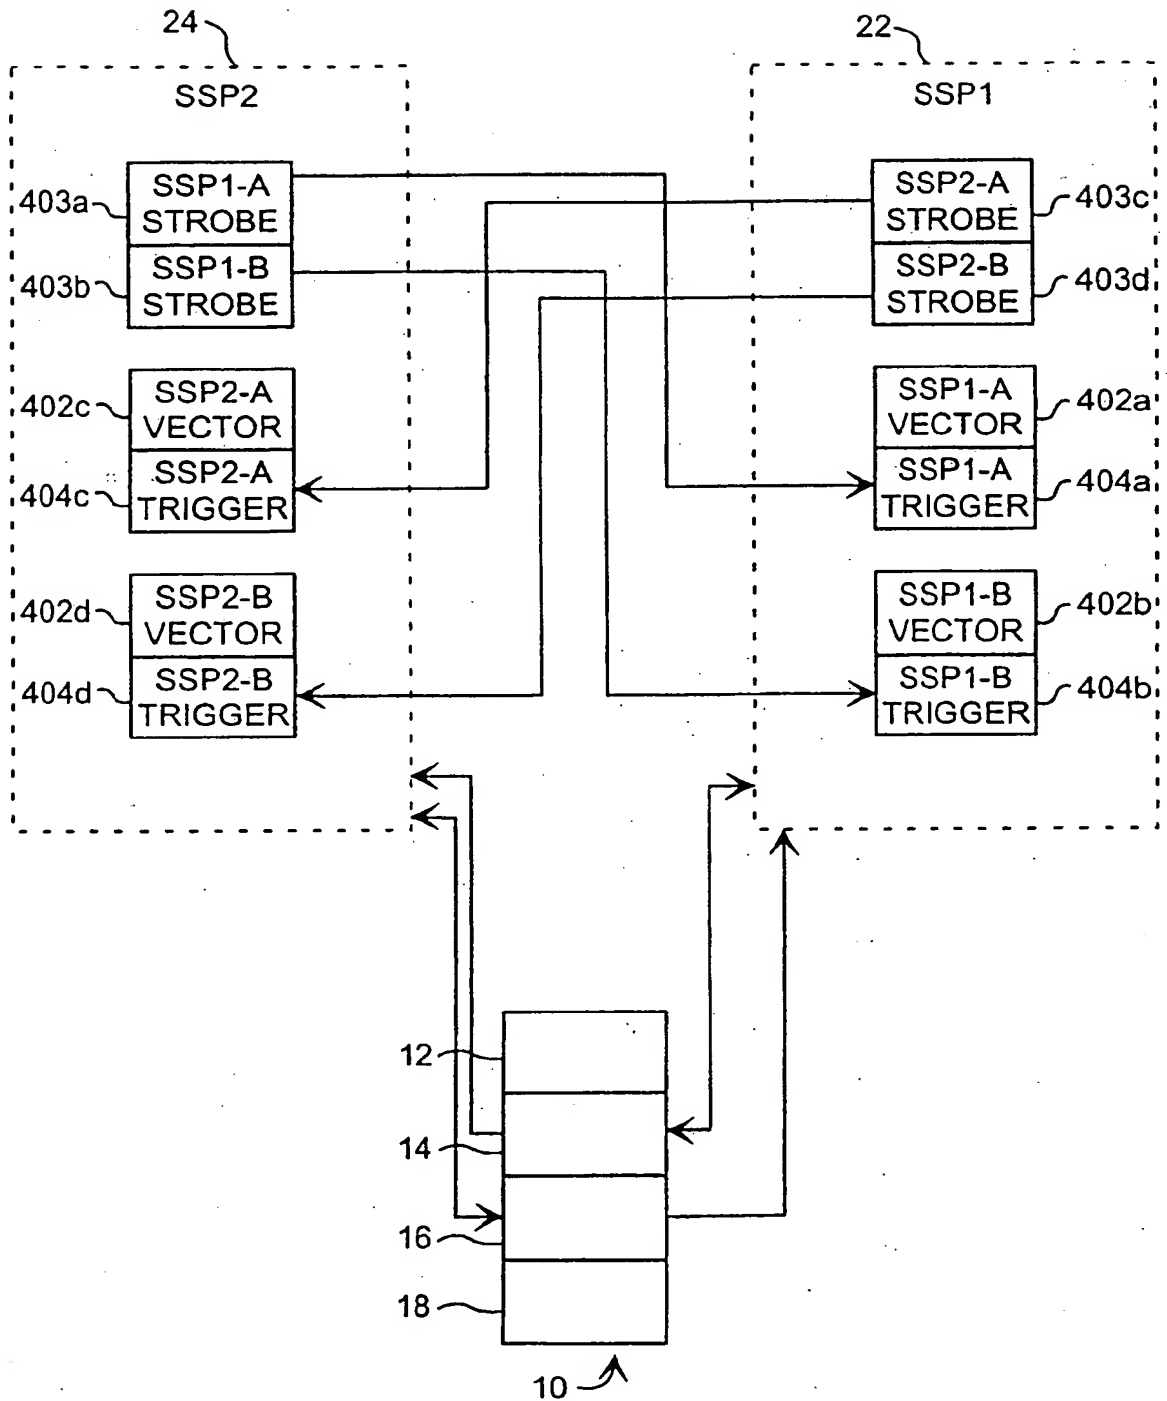


FIG. 3

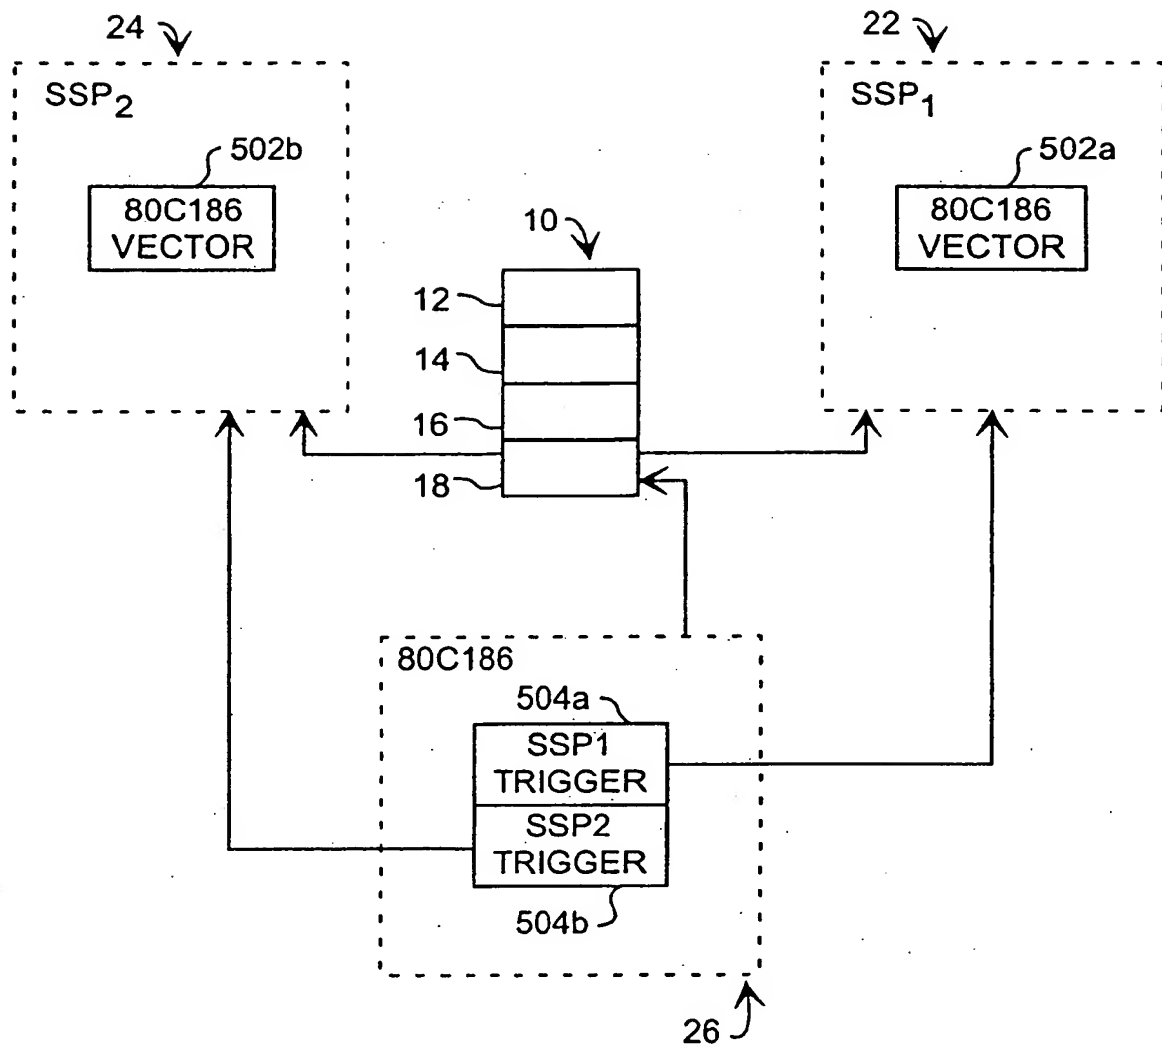


FIG.4

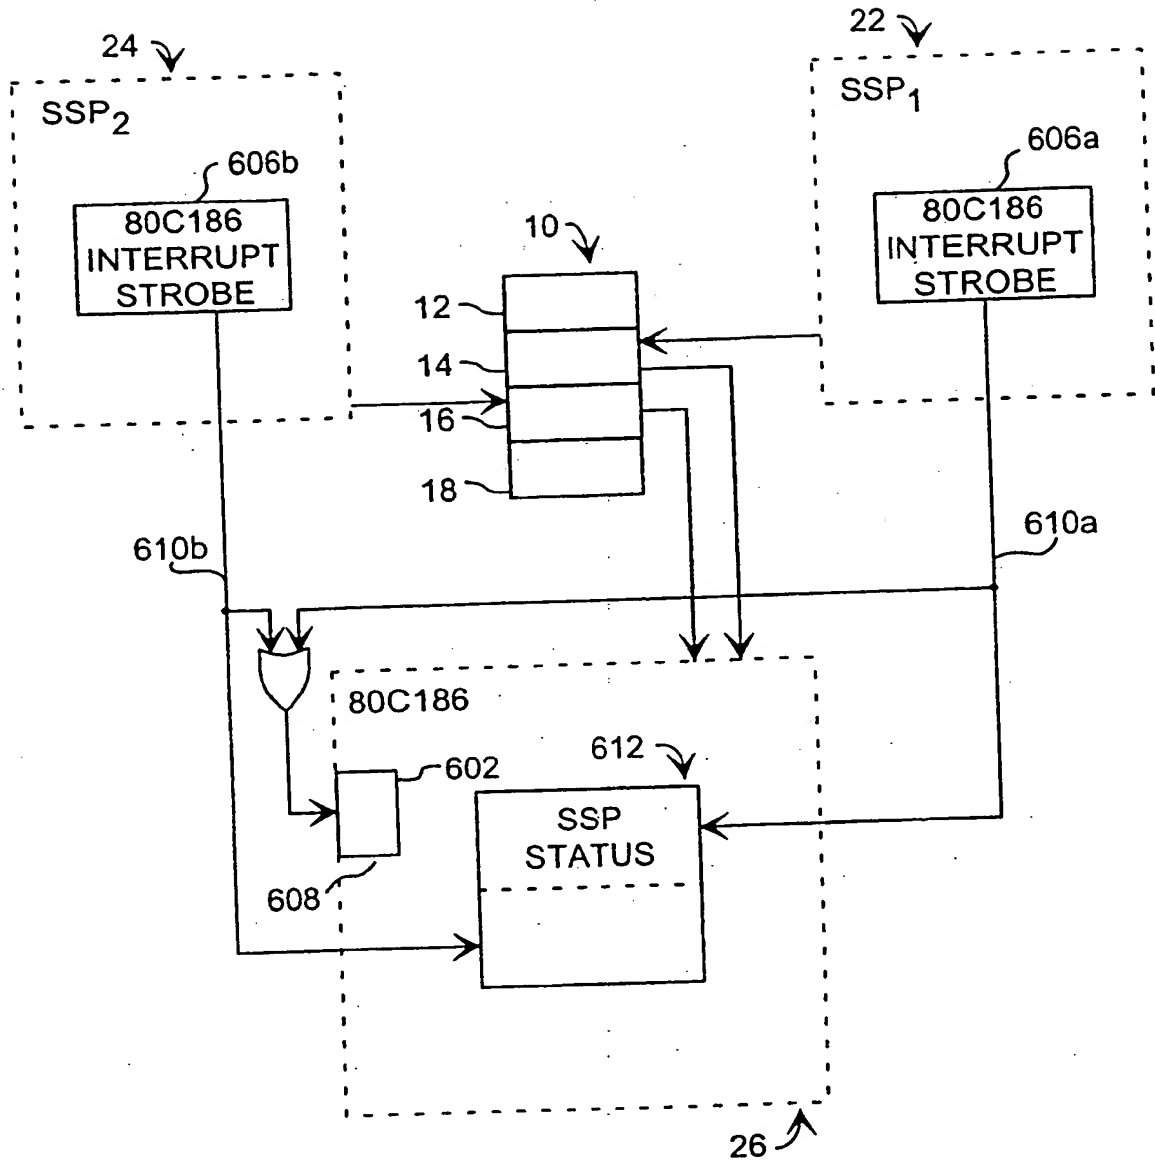


FIG. 5

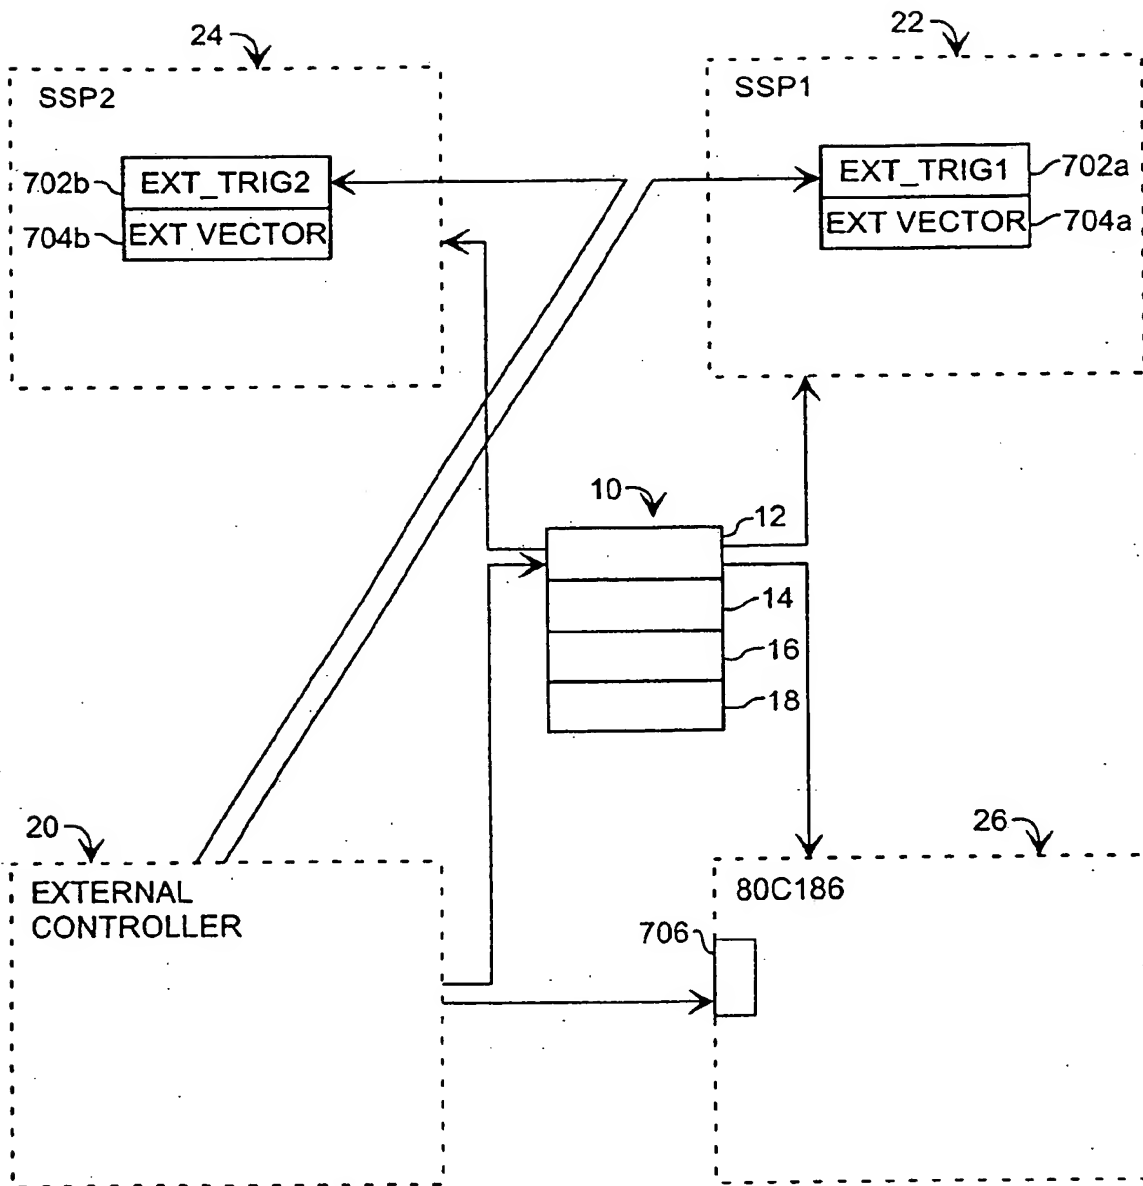


FIG. 6

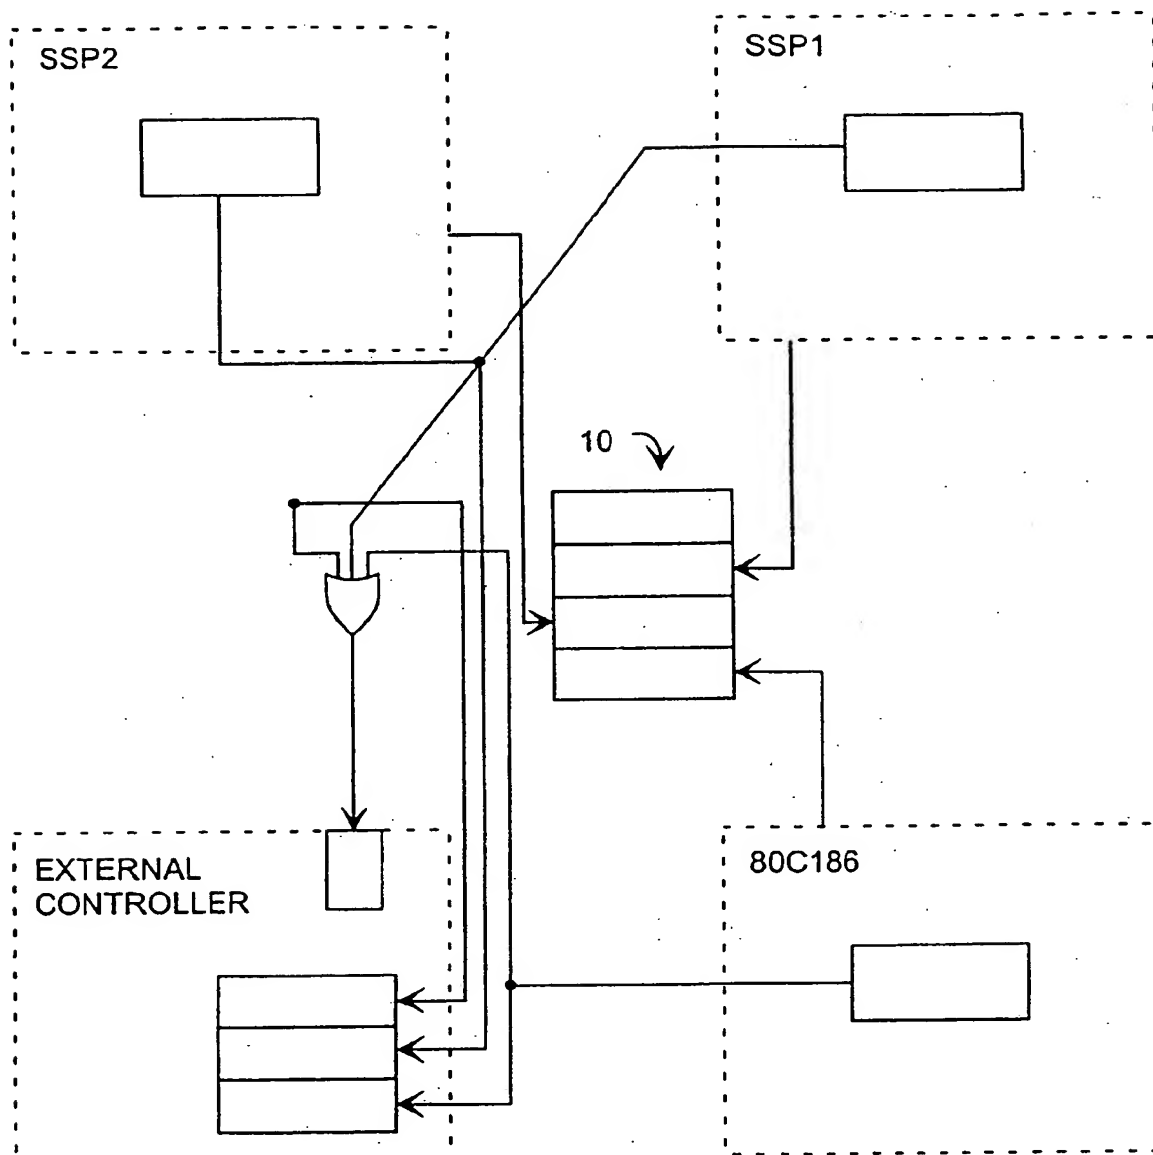


FIG. 7

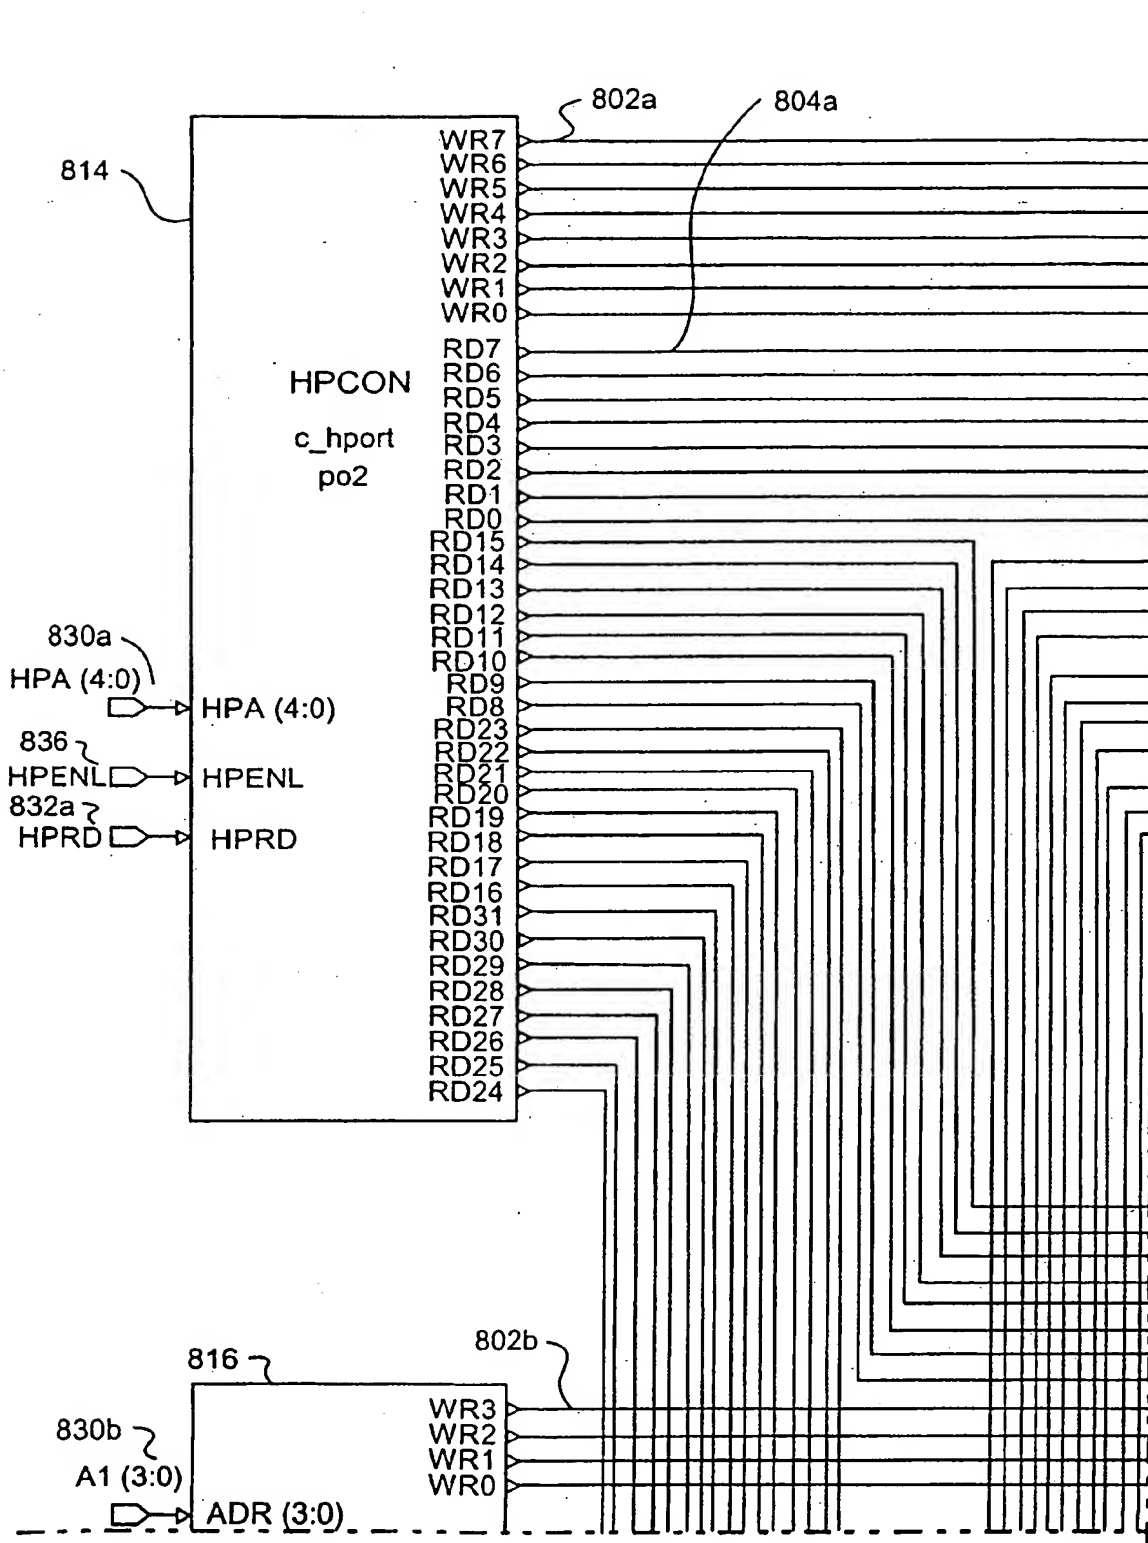


FIG. 8A

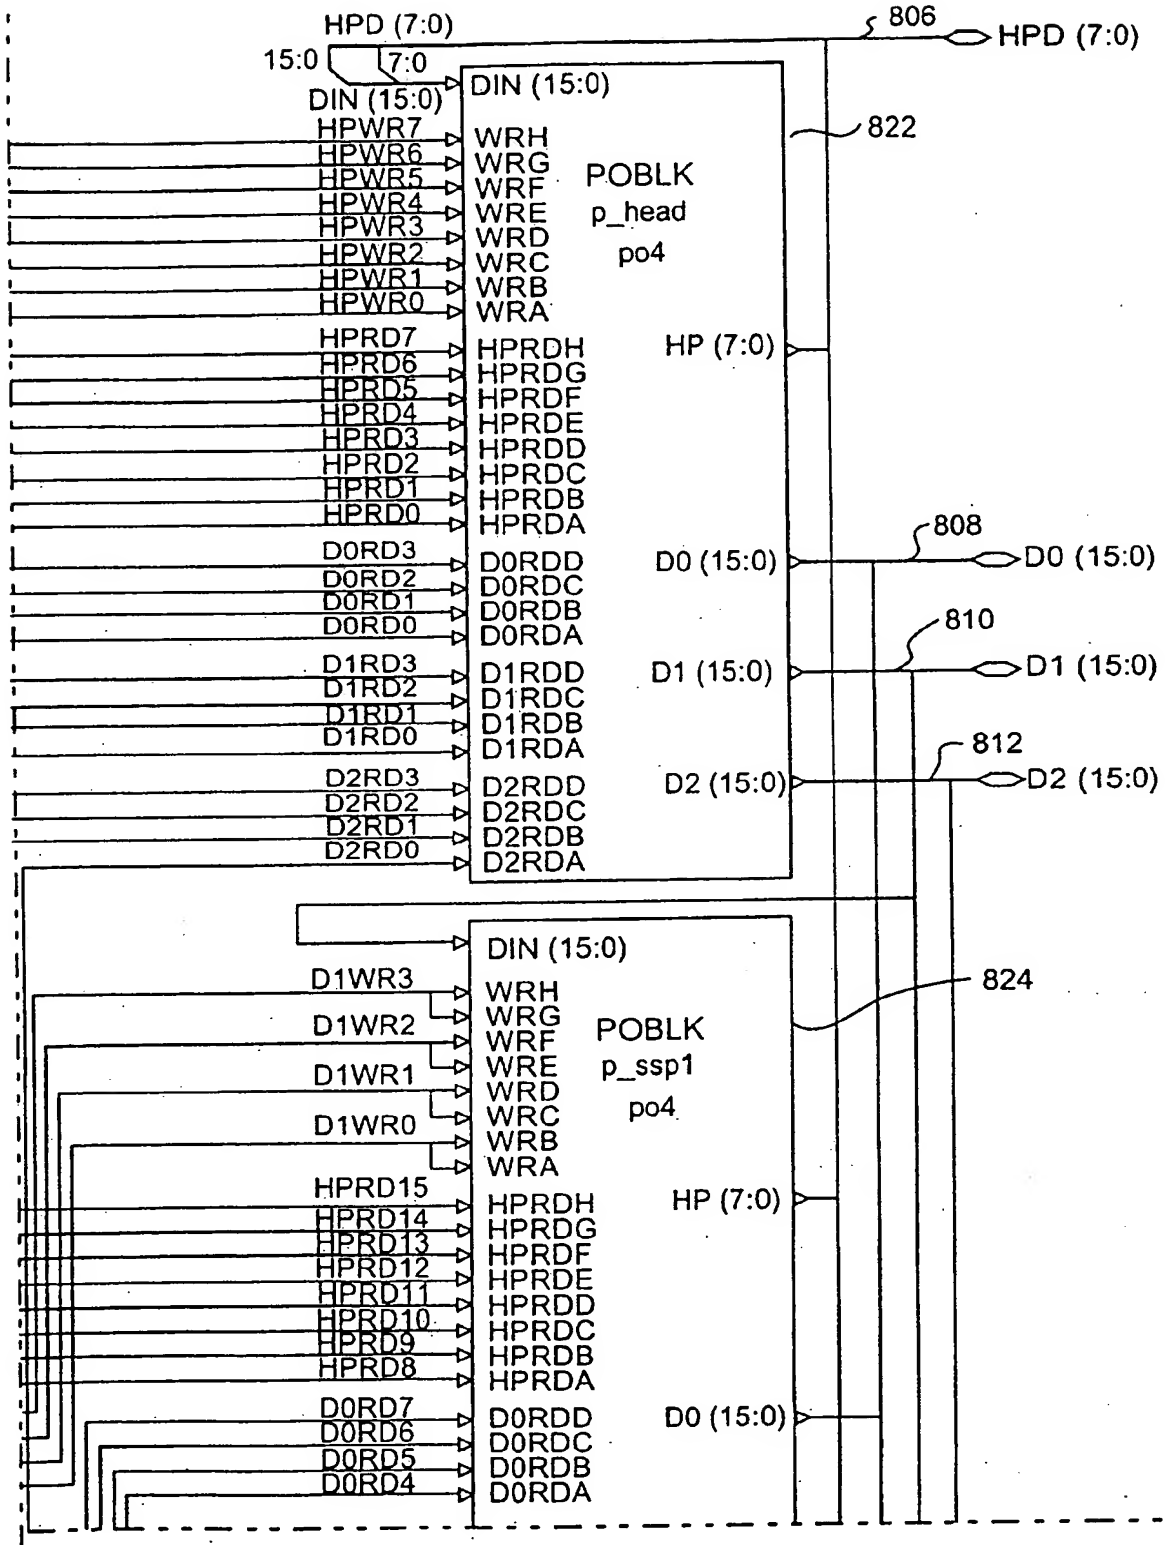


FIG. 8B

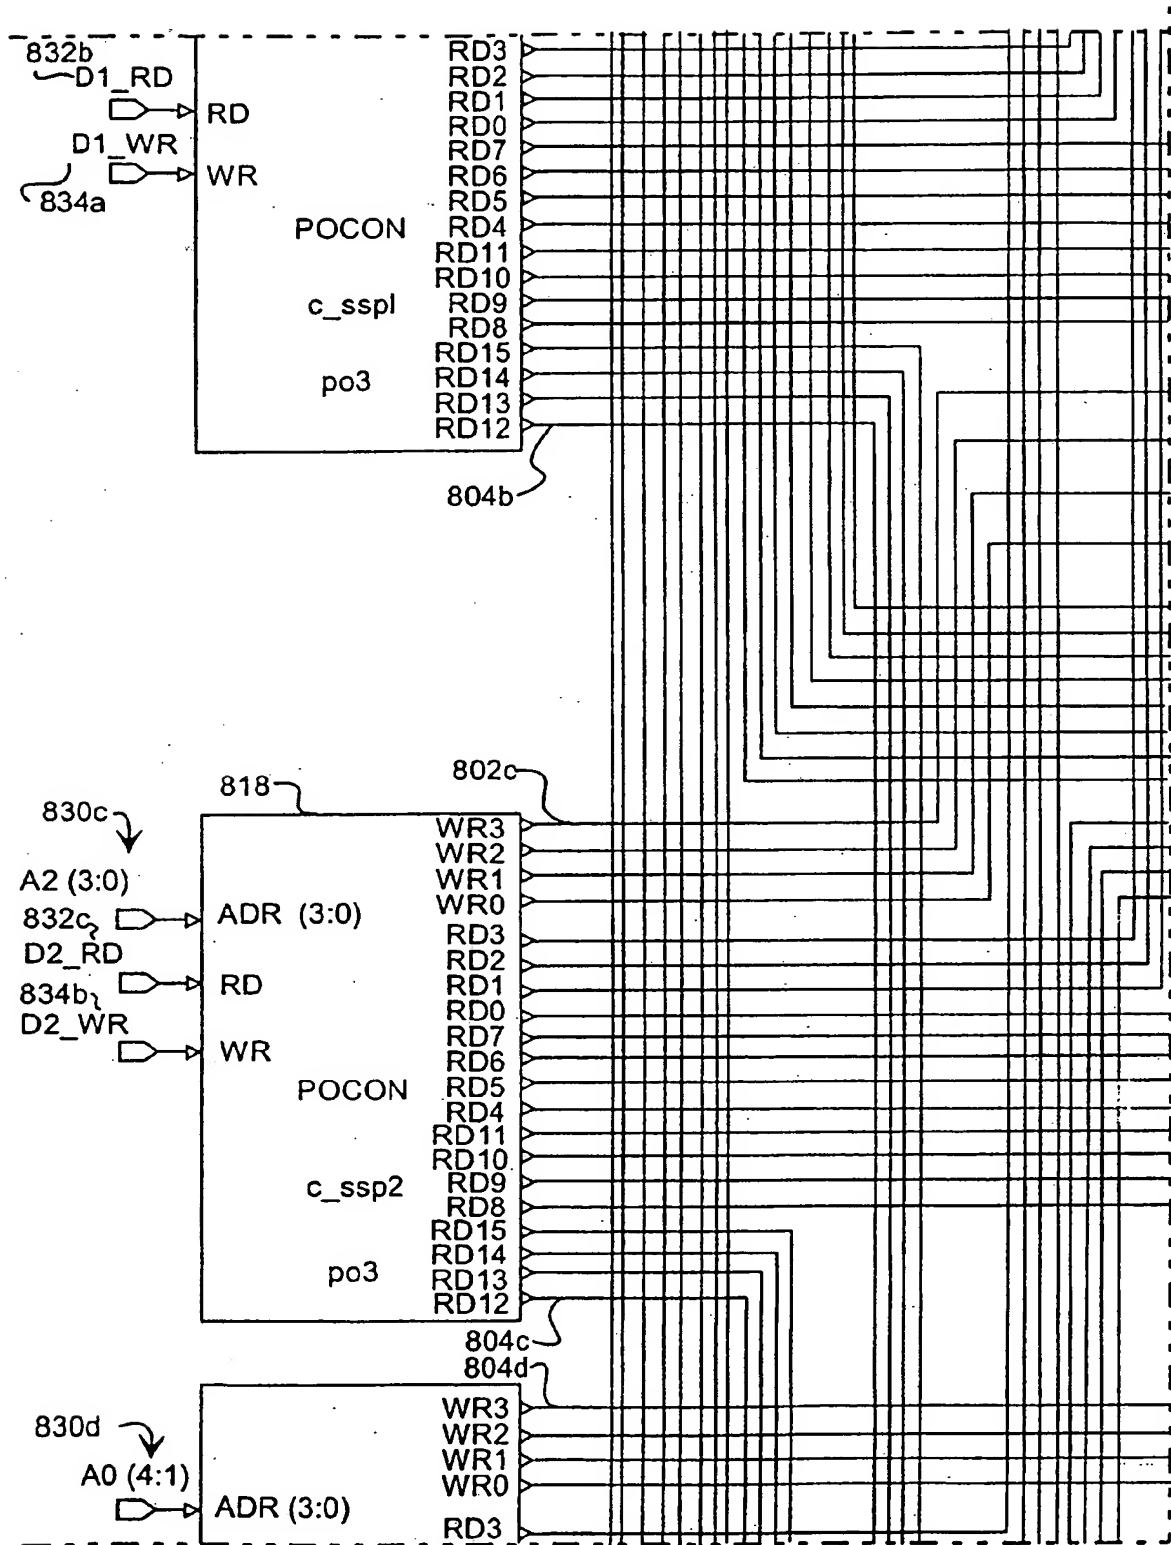


FIG. 8C

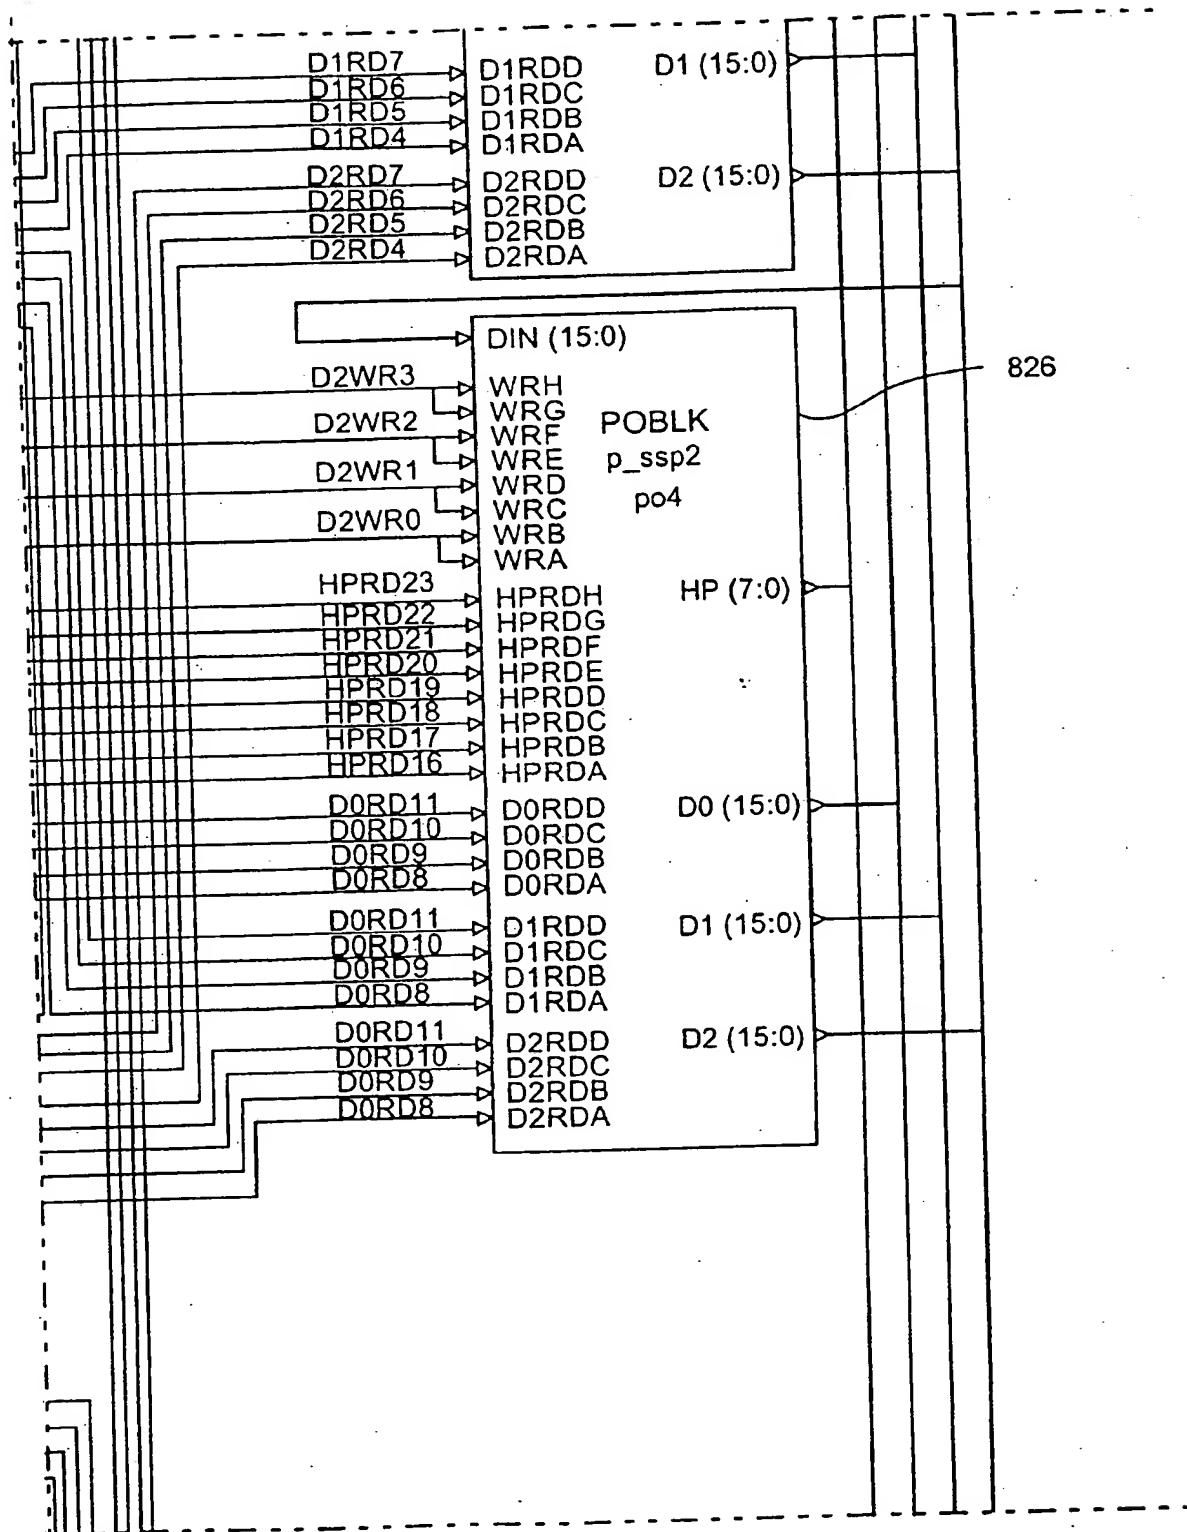


FIG. 8D

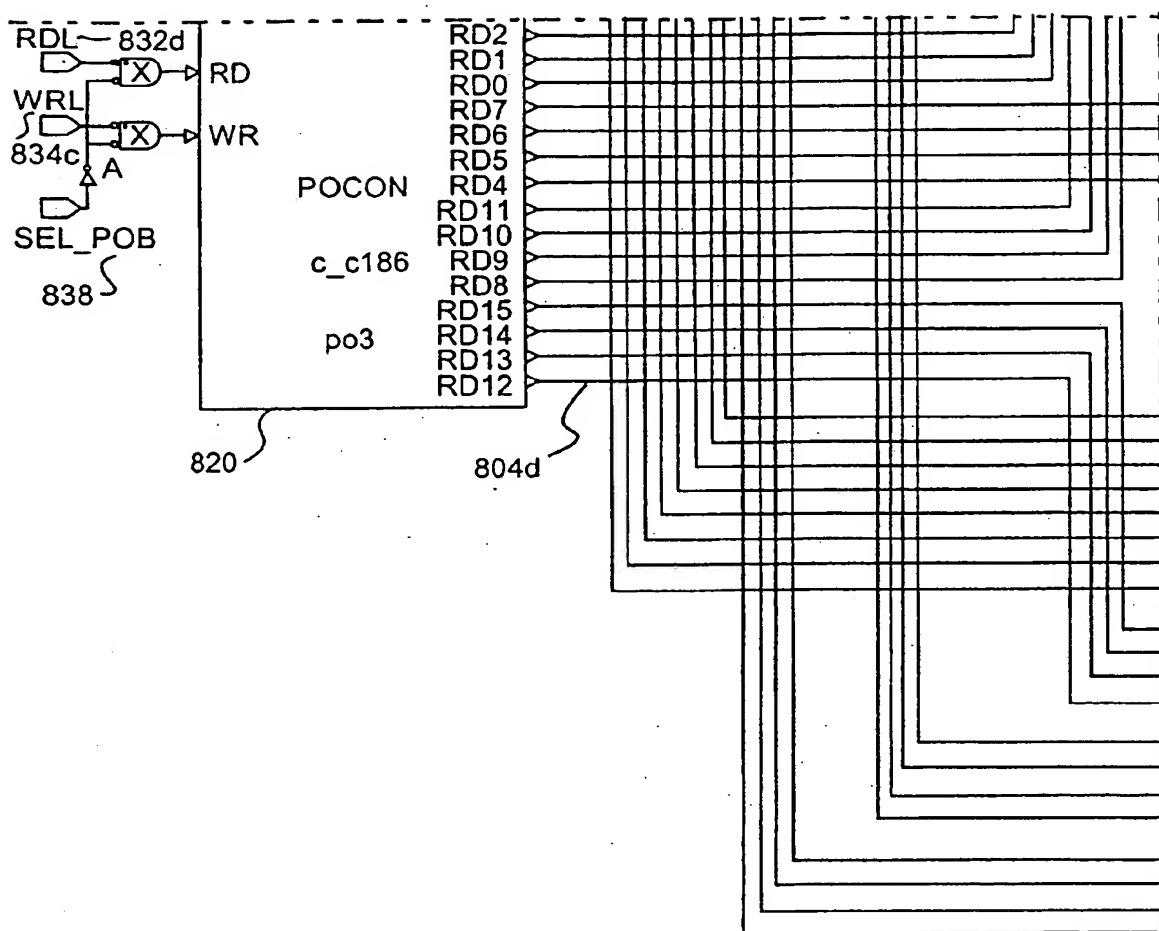


FIG. 8E

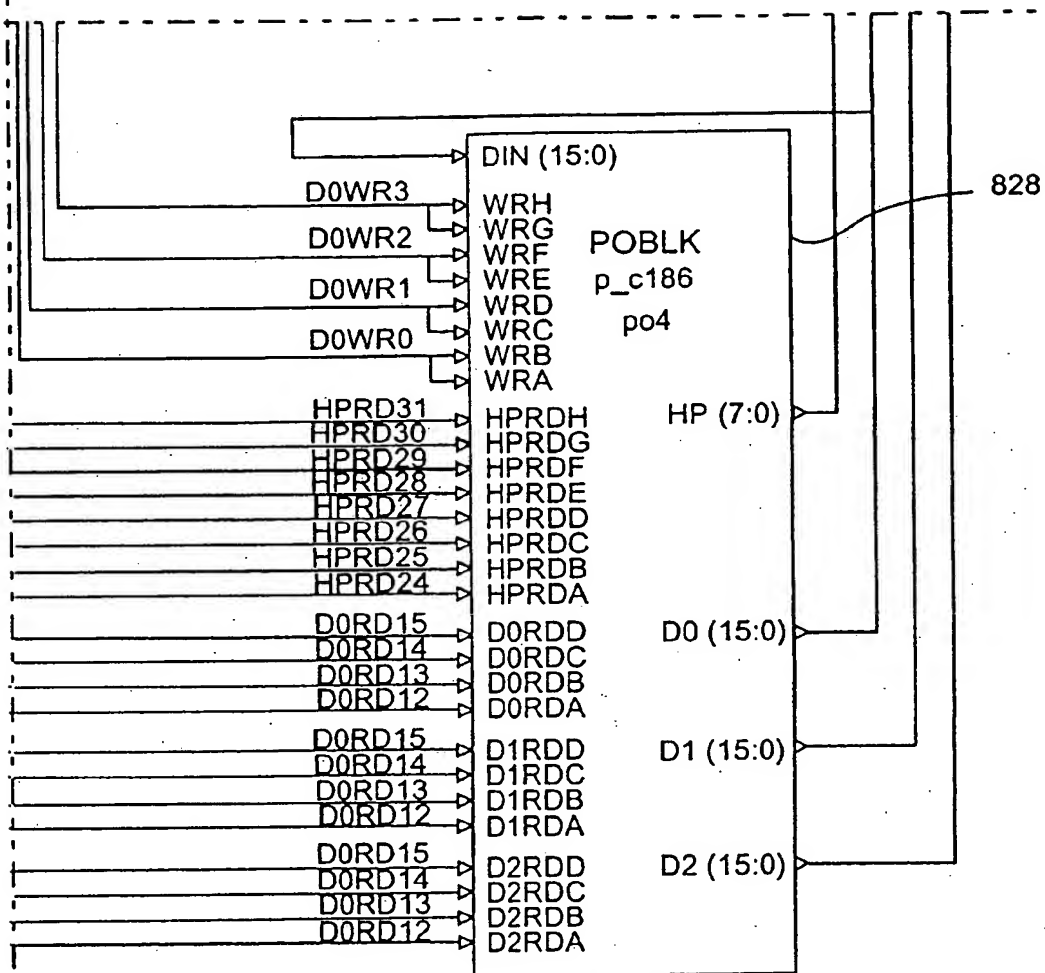


FIG. 8F

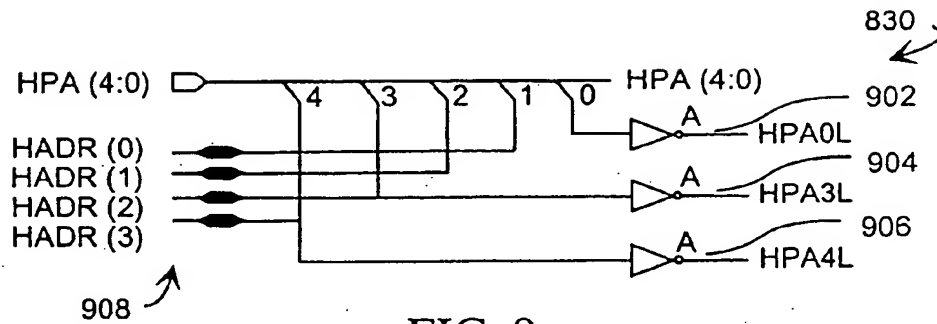


FIG. 9

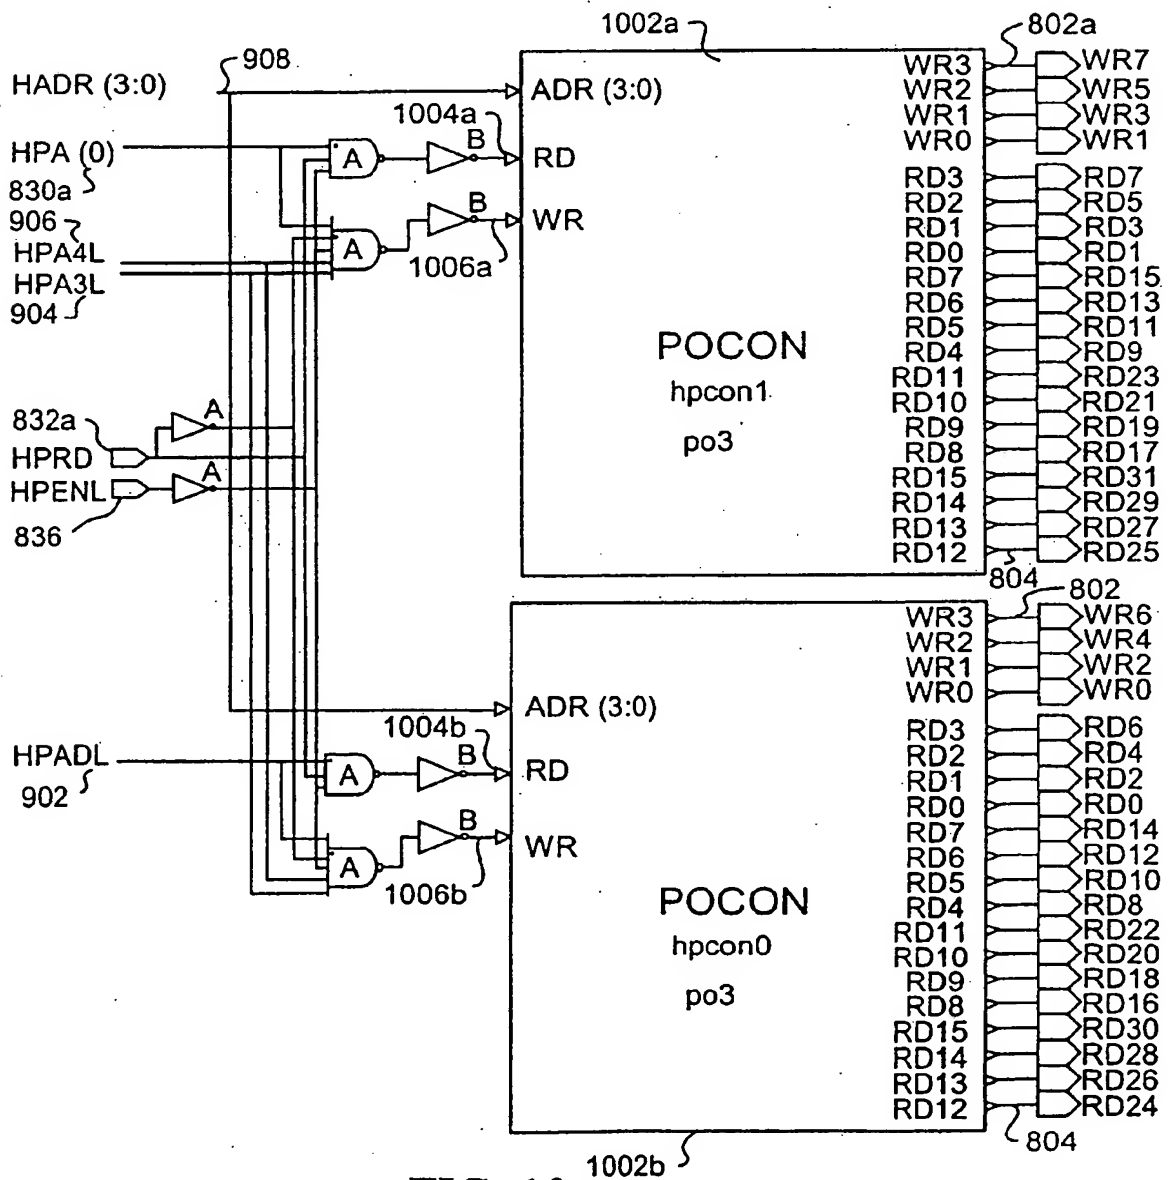


FIG. 10

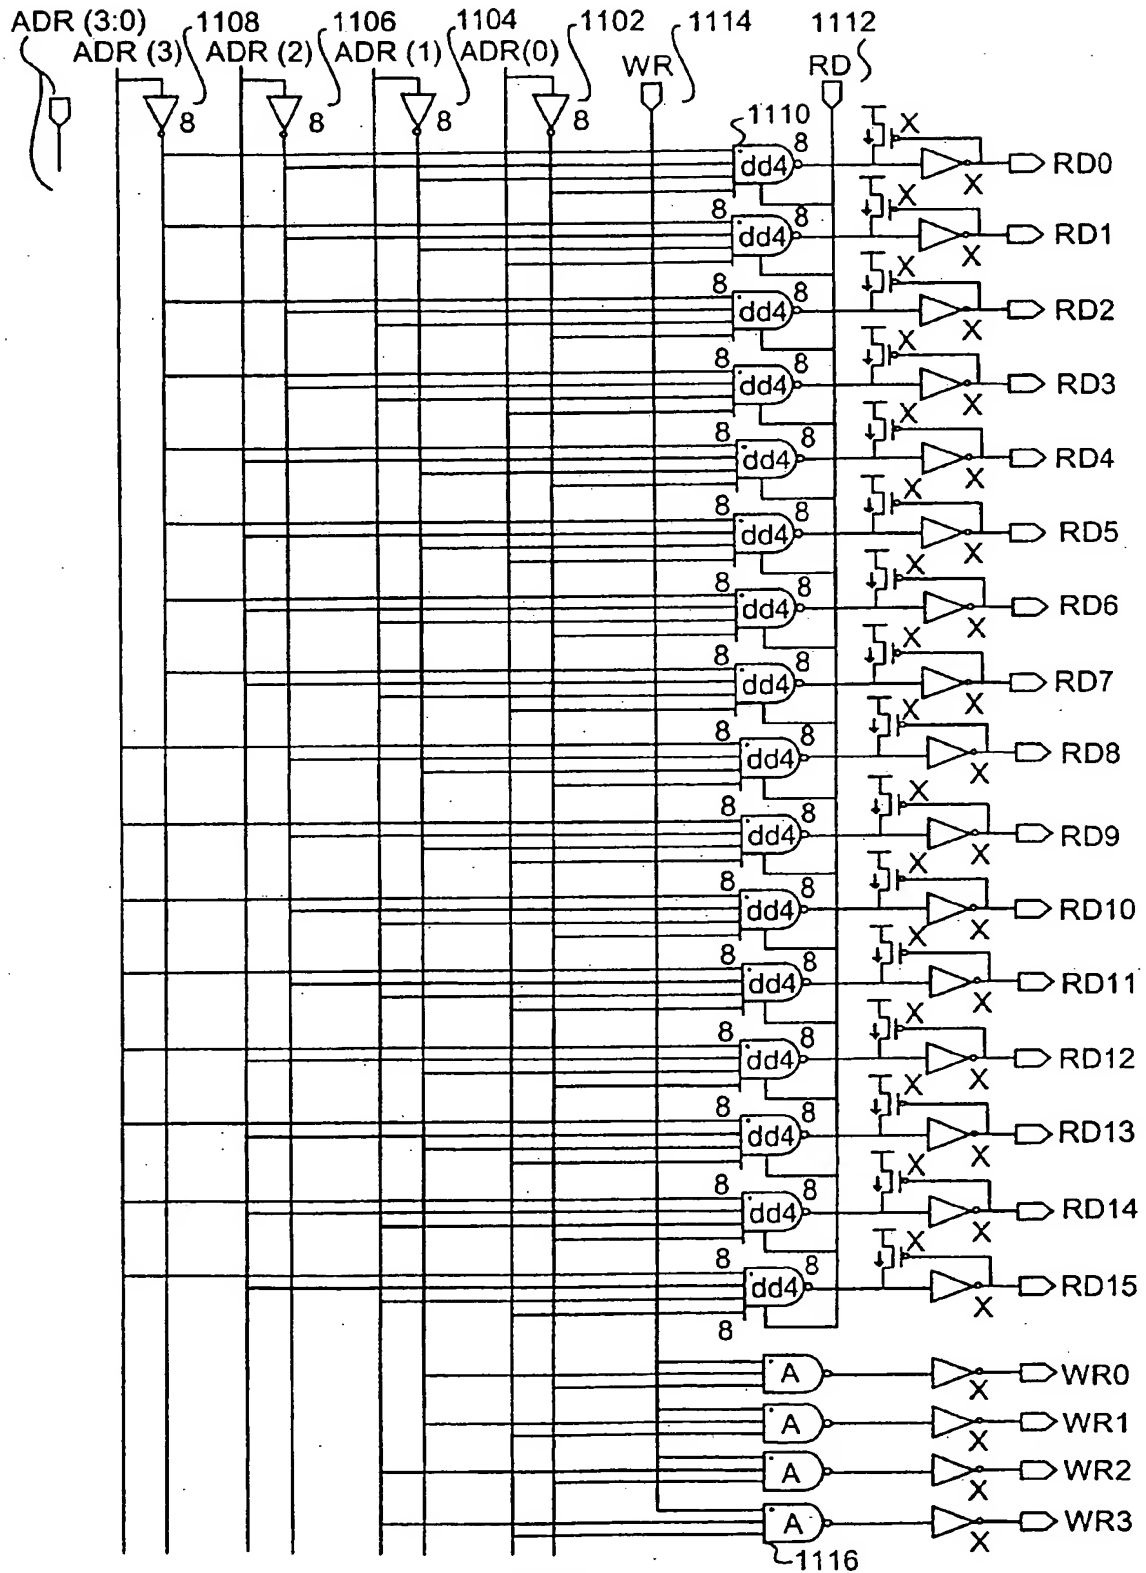


FIG. 11

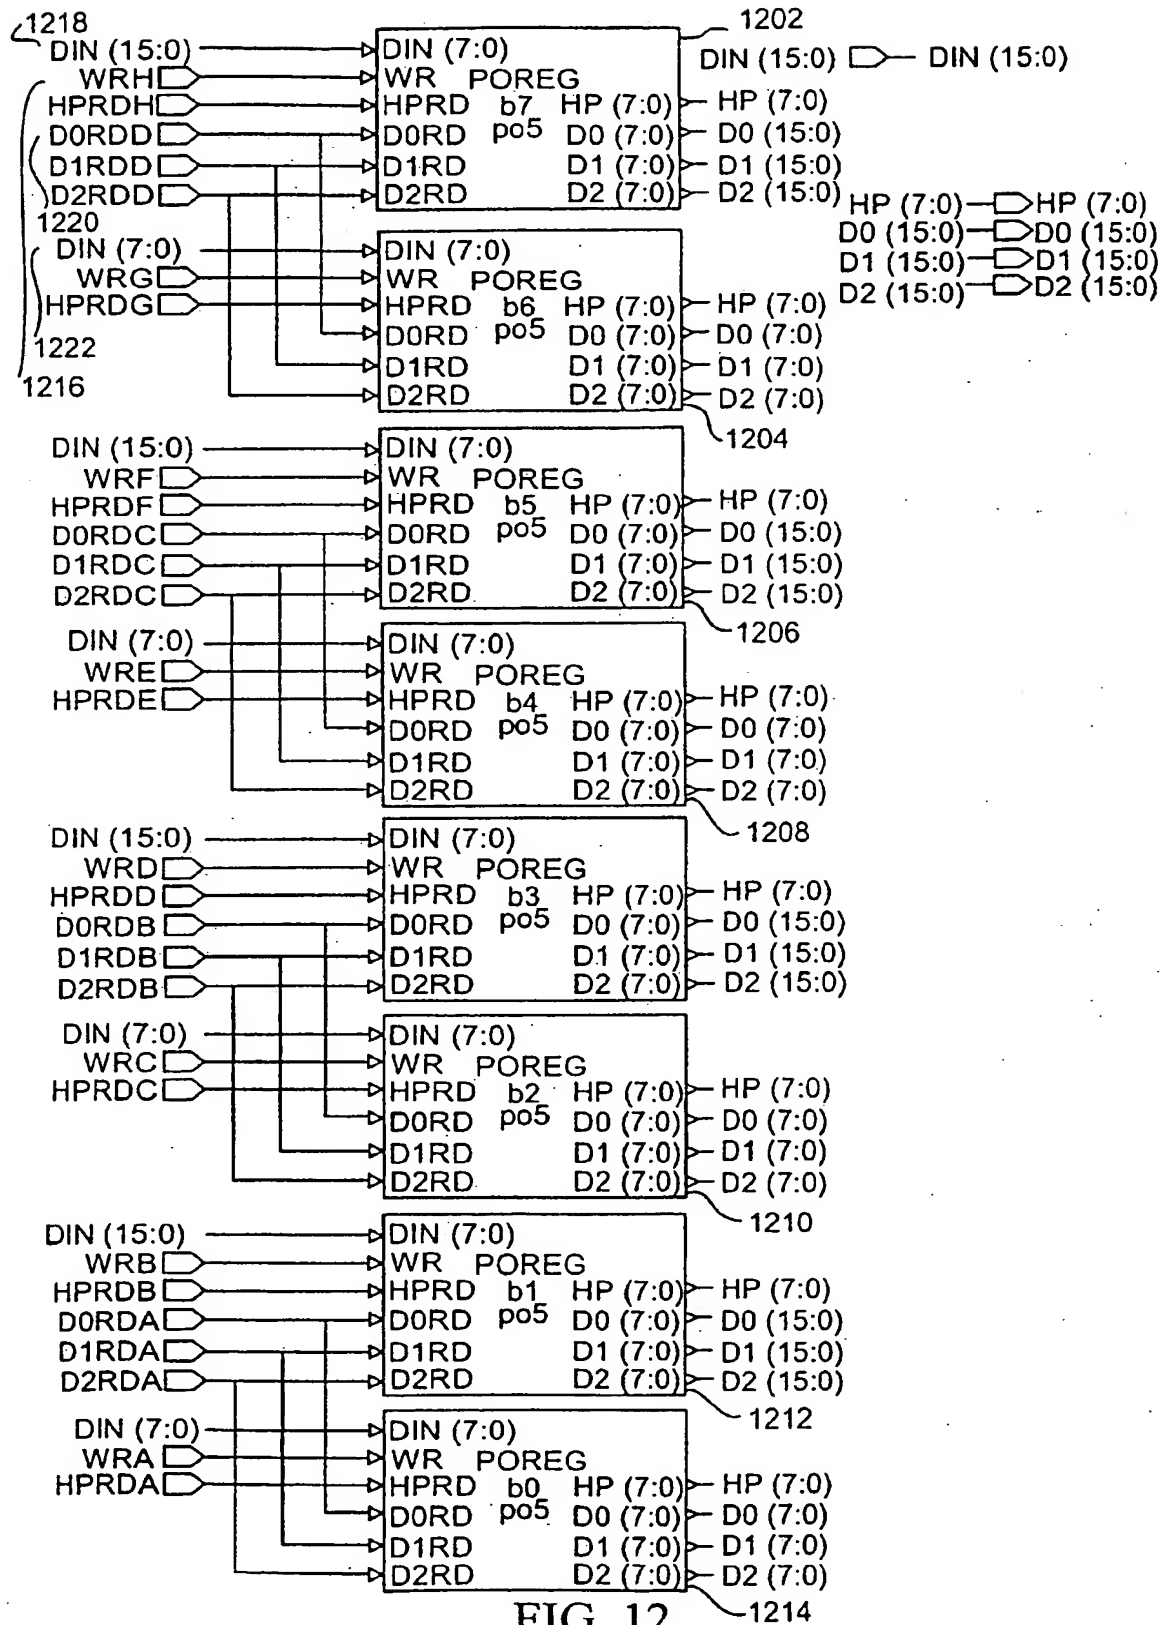


FIG. 12

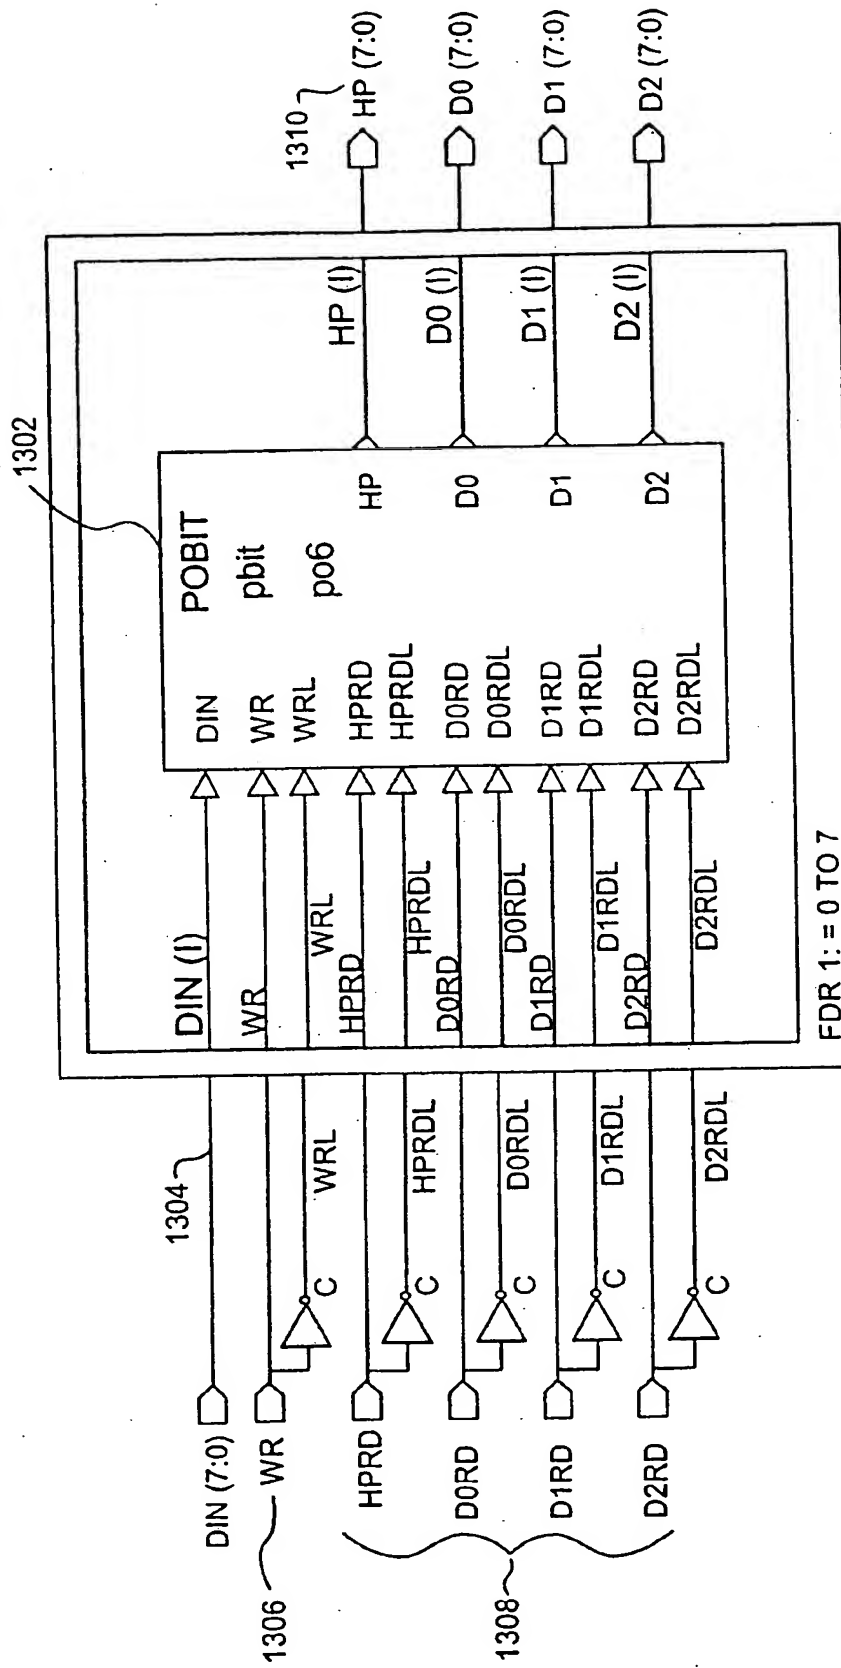


FIG. 13

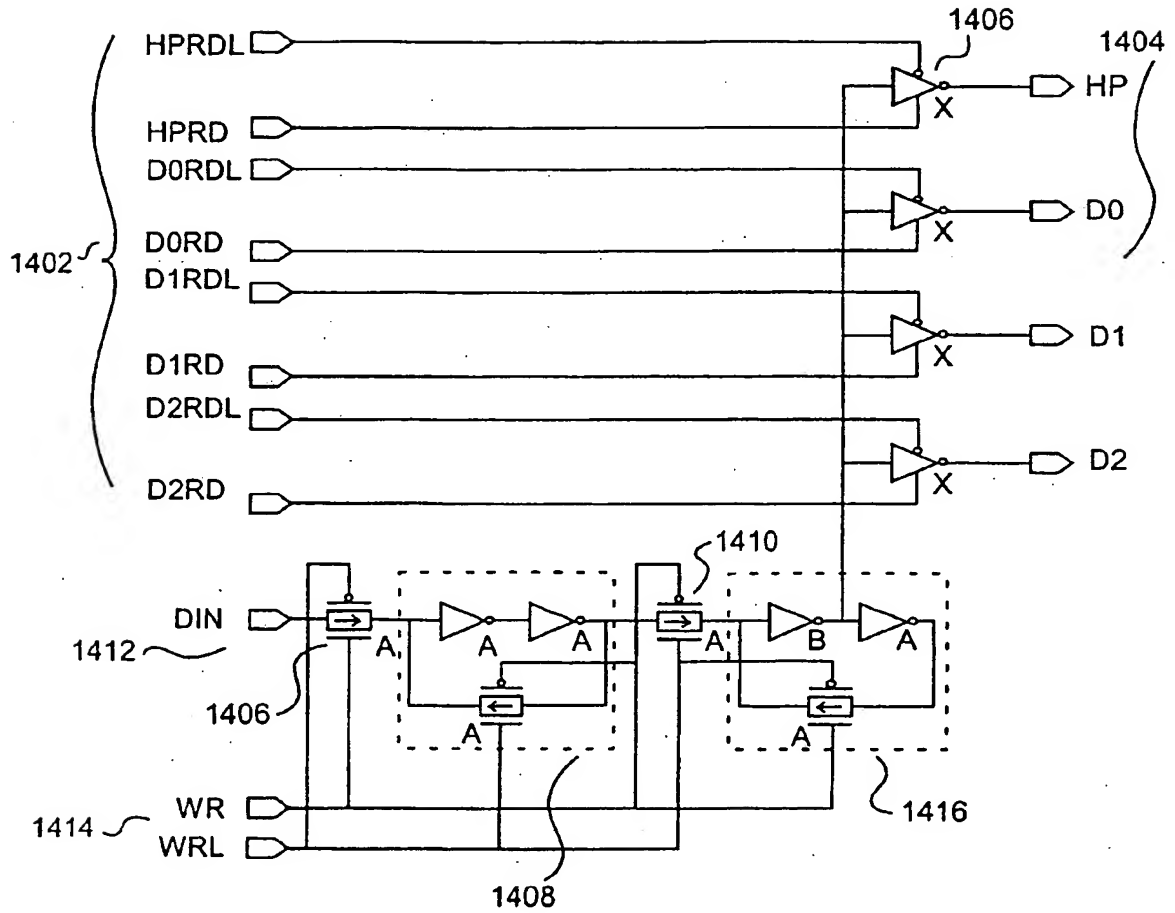


FIG. 14

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number: **0 640 929 A3**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **94305011.2**

(51) Int. Cl.⁶: **G06F 15/16**

(22) Date of filing: **07.07.94**

(30) Priority: **30.08.93 US 113299**

(43) Date of publication of application:
01.03.95 Bulletin 95/09

(84) Designated Contracting States:
BE DE DK ES FR GB GR IE IT LU NL PT SE

(88) Date of deferred publication of search report:
29.11.95 Bulletin 95/48

(71) Applicant: **ADVANCED MICRO DEVICES INC.**
One AMD Place,
P.O. Box 3453
Sunnyvale, California 94088-3453 (US)

(72) Inventor: **Freemster, Ryan**
2930 Kassarine Pass
Austin, Texas 78704-4655 (US)
Inventor: **Dettmer, David**
7902 Narin Drive
Austin, Texas 78749 (US)

(74) Representative: **Wright, Hugh Ronald et al**
Brookes & Martin
52/54 High Holborn
London WC1V 6SE (GB)

(54) **Inter-processor communication via post office RAM.**

(57) A device and method for providing inter-processor communication in a multi-processor architecture. A post office RAM has a plurality of mailboxes. Each mailbox is write-accessible by one port, but is read-accessible by the other ports. Thus, a processor device on a port has write-access to one mailbox, but can read the other mailboxes in the post office. A transmitting processor communicates with a receiving processor, by utilizing the post office. The transmitting processor writes information into its own mailbox, and signals a receiving processor. The receiving processor determines which of the processor devices signalled it, and reads the information in the transmitting processor's mailbox.

EP 0 640 929 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 30 5011

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	WO-A-88 02149 (M. A. FISCHER) * page 6, line 6 - page 8, line 7 * * page 12, line 10 - page 13, line 7 * * page 14, line 29 - page 16, line 5 * * page 21, line 7 - line 16 * * page 22, line 27 - page 24, line 3 * * claims; figures 1-13 *	1,13,22	G06F15/16
A	-----	2-12, 14-21, 23,24	
A	EP-A-0 376 003 (I. B. M.) * page 4, line 1 - page 8, line 50; claim 1; figure 2 *	1-24	
A	EP-A-0 368 655 (FUJITSU LIMITED) * column 2, line 39 - column 5, line 27; claim 1; figures 1-4 *	1-24	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G06F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 October 1995	Examiner Soler, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 (01.92) (POMC01)